

Guangzhou VanGaa Lighting Tech. Co., Ltd
Homepage: www.VanGaa.com, www.vangaalight.com
Email: info@vangaalight.com
Tel: 0086-20-86432439
Factory add: Building B, Langling Industry Park, Huaxing
Industry Area, Xinhua Town, Huadu District, Guangzhou, China



wechat



facebook



youtube



 **VanGaa**
Theater & Show Lighting Catalogue



Industry Area of VanGaa Lighting Factory



A Corner of Workshop



A Scene of Showroom



A Corner of Technical Department




The Building of Sales Center



Reception Centre



Service Team of Oversea Market

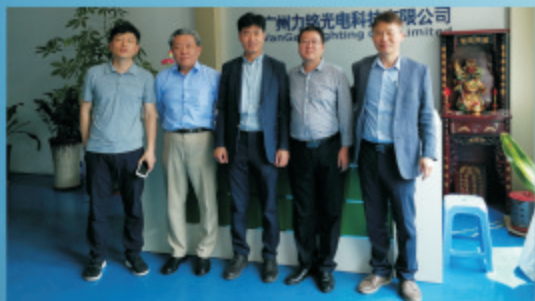

Customers Visit Our Factory



Exhibition

About us

VanGaa--Achieving Users' Value!

Professional LED Studio Light & Stage Light Factory

VanGaa Lighting Co., Limited is an internationally recognized company that focus on energy efficient LED technology for professional studio and stage lighting fixtures. We are involved the business of lighting fixtures designing, manufacturing, selling, events and project designing, installation, after-sales service and others.

VanGaa Lighting is established on 2006 in Guangzhou, and we have made up our own factory on 2009 which owns three production lines now. We design and developed the professional studio lighting fixtures, such as the LED Fresnel Spot Light, LED Profile Spot Light, LED Meeting Room Panel Light, and the stage lighting fixtures, such as LED Moving Head Light, LED Par Light, Moving Head Light. Our company incorporates the latest in production processes and quality assurance to ensure that its products meet the highest standards of quality and refinement. The products made by this manufacturer strictly comply with ISO9001:2008, ISO14001:2004, CE and RoSH safety standards.

Our company's reputation is founded upon innovative, pragmatic design and manufacture of a focused and professional range of LED studio and stage lights. According to our principle "Achieving Users' Value", we design, manufacture and popularize the quality, professional and practical fixtures for studio and entertainment.

Our Principles

- Environment friendly and Energy frugally, lighting the green world
- Supply Reliable Quality Product
- Deliver on Time
- Offer Professional Technical support
- Invest in R&D and stay at the forefront of technology
- Rigorously test everything we make
- Initiative to communicate with our customers

Innovation, Quality and Performance, We are Achieving Users' Value!



Contents



Page 01-14
LED Fresnel Spot Light Series

Page 15-28
LED Ellipsoidal Profile Spotlight Series

Page 29-36
LED Film Video Sky Panel Light Series

Page 37-40
LED Cyclorama Light Series

Page 41-58
Moving Head Light Series

Page 59-62
Matrix Blinder Light

Page 63-66
Follow Spot Light Series

Page 67-70
LED Wall Wash Light Series

Page 71-72
LED Strobe Light Series




Page 73-76
LED Par Light Series

Page 77-79
Control System Series

Page 80
Accessories Series






Motorize Zoom LED Fresnel Daylight

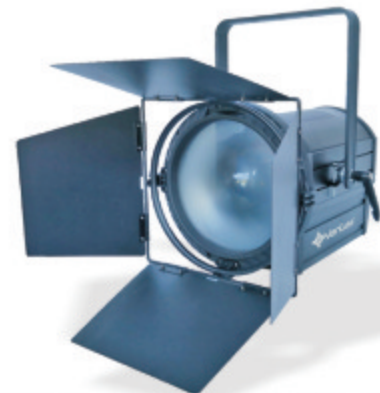

Specification		
Product model	VG-DL450/VG-DL550	VG-DL450-C
Light sources	400W/500W high CRI COB LED Lamp	400W high CRI COB LED Lamp
Input power	AC100-240V, 50/60Hz	AC100-240V, 50/60Hz
Power	450W/550W	450W
CRI	Ra≥95, or Ra≥97	Ra≥95, or Ra≥97
Color temp.	3200K/5600K	3200K-5600K
Dimmer	0-100% linear dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons	LCD display+4 buttons
DMX channel	3CH, 4CH, 5CH, 14CH	4CH, 5CH, 6CH, 15CH
Beam angle	15-60degree, motorize zoom	15-60degree, motorize zoom
Cooling system	Copper tube convector+mute fan	Copper tube convector+mute fan
Control mode	DMX512/Demo/Manual	DMX512/Demo/Manual
IP rating	IP 20	IP 20
Accessories	Barn doors, power cable, signal cable	Barn doors, power cable, signal cable
Net weight	12kg	12kg
Body size	450*394*337mm	450*394*337mm

Product details

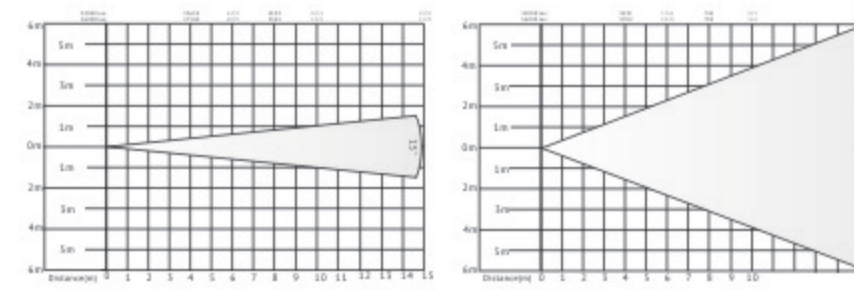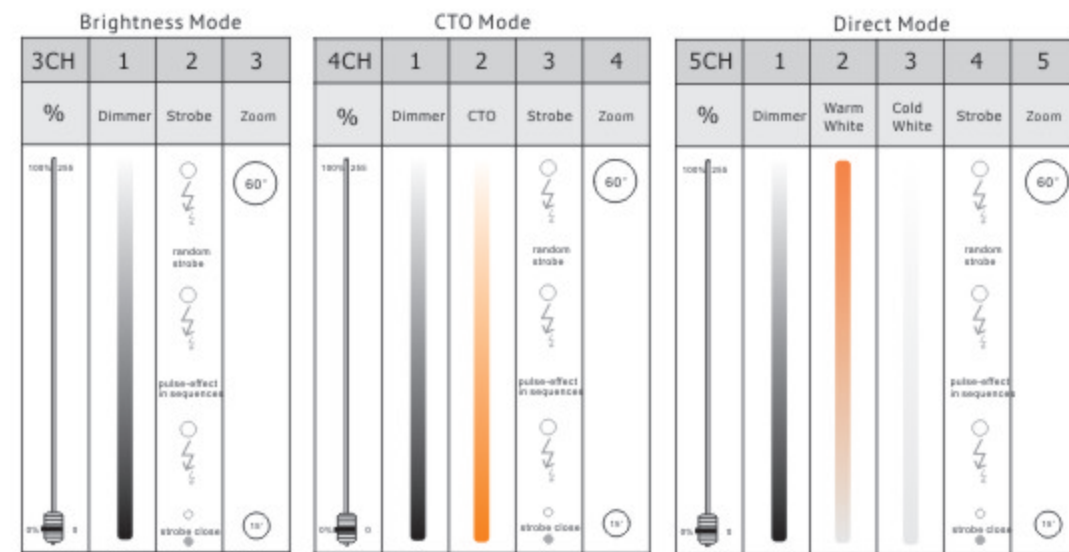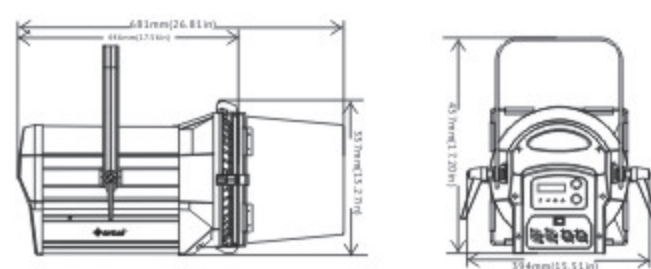

Features

- Equips 400W/500W brand high CRI high brightness LED chips, enough power for big space studio room;
- Use large copper tube radiator as the main parts of cooling system, and digital temperature sensor to control the noise of mute fan within 38-45db which suit the international studio room environment standard;
- 400W bi-color led chip is optional, which can make sure 3200K, 5600K, 4500K and other different color temperature output keep 200W to make sure the brightness;
- Intelligent control software has been used for this light. The light can controlled by DMX signal, and also can control color temperature and dimmer by rotary knob;
- High CRI 95Ra or 97Ra optional, flicker free; 0-100% linear dimmer smoothly.

Details



Install Methods




Application




Effect



Package





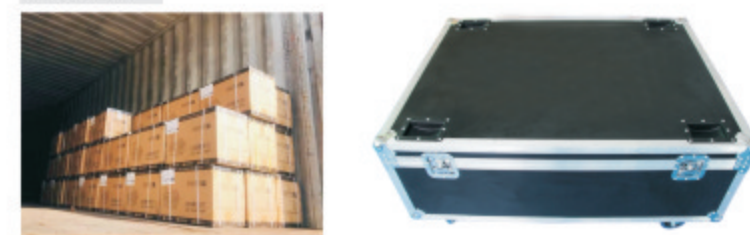


Motorize Zoom LED Fresnel Spot Light

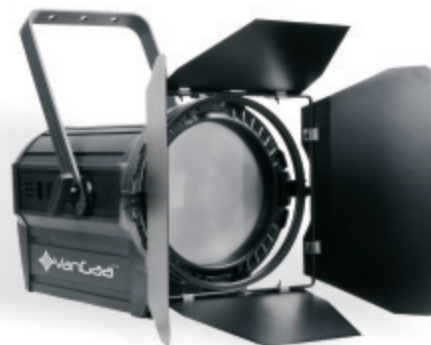

Specification	
Product model	VG-PB300W-D/VG-PB200W-D/VG-PB100W-D
Light sources	300W/200W/100W high CRI COB LED Lamp
Input power	AC100~240V, 50/60Hz
Power	300W/200W/100W
CRI	Ra≥95, or Ra≥97
Color temp.	3200K/5600K
Dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons
DMX channel	3CH
Beam angle	15-60degree, motorize&manual zoom
Cooling system	Copper tube convector+mute fan
Control mode	DMX512/Demo/Manual
IP rating	IP 20
Accessories	Barn doors, power cable, signal cable
Net weight	7.5kg
Body size	455*265*292mm

Product details

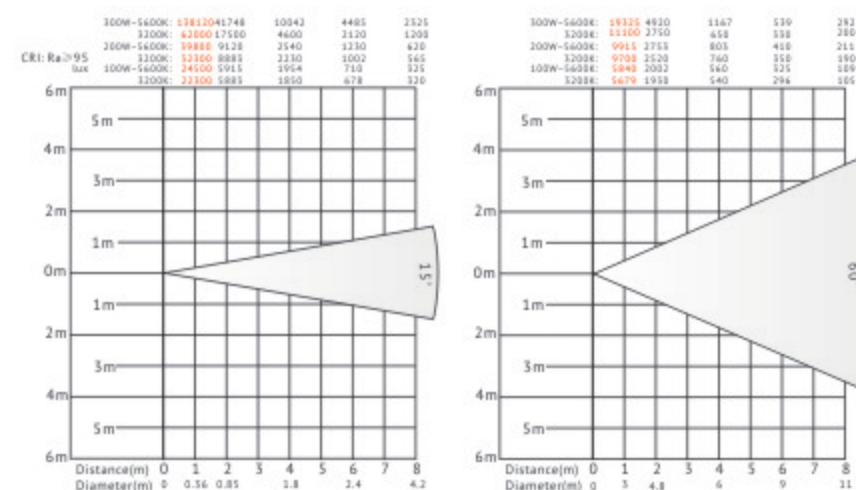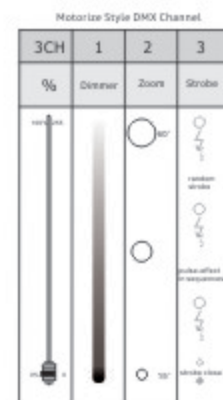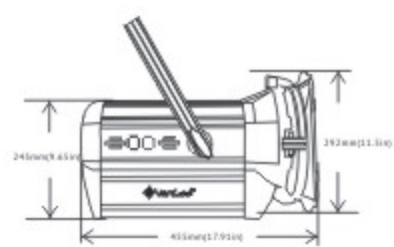


Features

- Equips 100W/200W/300W brand high CRI high brightness LED chips, different power optional;
- Use large copper tube radiator as the main parts of cooling system, and digital temperature sensor to control the noise of mute fan within 38-45db which suit the international studio room environment standard;
- Use screw to adjust the different beam angle from spot(15degree) to flood(60degree), motorize/DMX signal control the adjustment;
- Compact structure, beautiful appearance, unique, the housing, software, PCB and other inner structure is independent research and development by vangaa lighting;
- High CRI 95Ra or 97Ra optional, flicker free; 0-100% linear dimmer smoothly.

Application



Effect

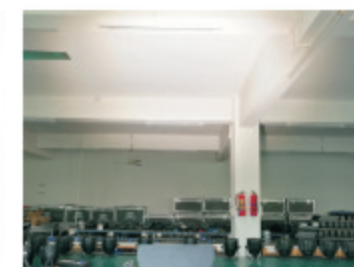

Manufacturing



Package




Manual Zoom LED Fresnel Spot Light




Specification	
Product model	VG-PB300W/VG-PB200W/VG-PB100W
Light sources	300W/200W/100W high CRI COB LED Lamp
Input power	AC100~240V, 50/60Hz
Power	300W/200W/100W
CRI	Ra≥95, or Ra≥97
Color temp.	3200K/5600K
Dimmer	0~100% linear dimmer
Control panel	LCD display+4 buttons
DMX channel	1CH, 2CH
Beam angle	15-60degree, manual zoom
Cooling system	Copper tube convector+mute fan
Control mode	DMX512/Demo/Manual
IP rating	IP 20
Accessories	Barn doors, power cable, signal cable
Net weight	7.5kg
Body size	455*265*292mm



Product details

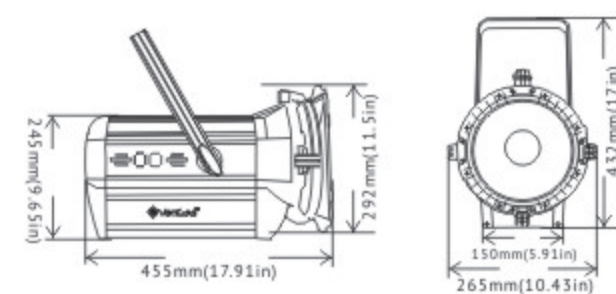

Manual zoom Style DMX Channel

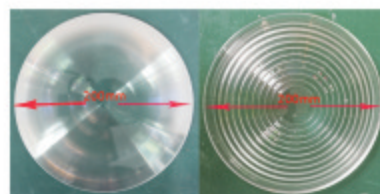

different style fresnel lens optional

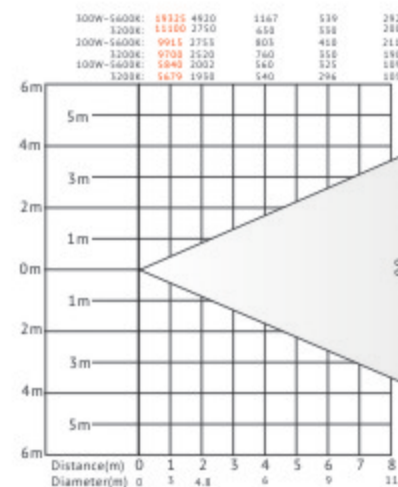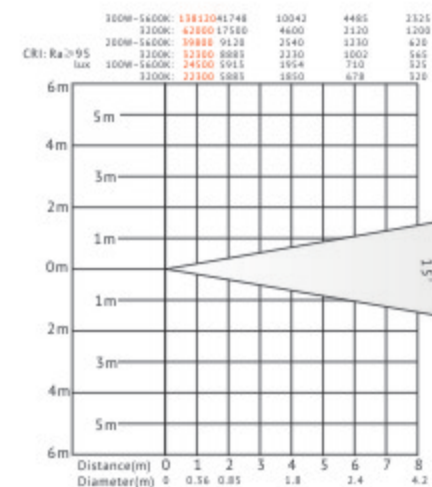

Features

- Equips 100W/200W/300W brand high CRI high brightness LED chips, different power optional;
- Use large copper tube radiator as the main parts of cooling system, and digital temperature sensor to control the noise of mute fan within 38-45db which suit the international studio room environment standard;
- Use screw to adjust the different beam angle from spot(15degree) to flood(60degree), there is the rotary know to adjust the angle at the back control panel easily;
- Compact structure, beautiful appearance, unique, the housing, software, PCB and other inner structure is independent research and development by vangaa lighting;
- High CRI 95Ra or 97Ra optional, flicker free; 0-100% linear dimmer smoothly.

Effect



Manufacturing



Package






Application



Bi-color LED Fresnel Spot Light



Product details

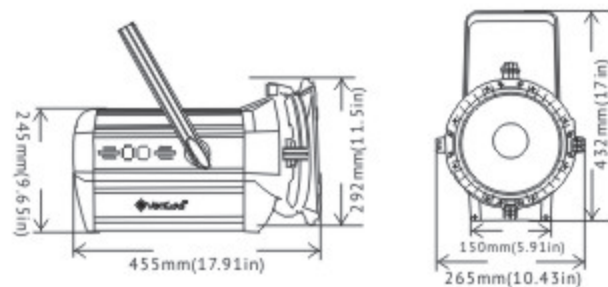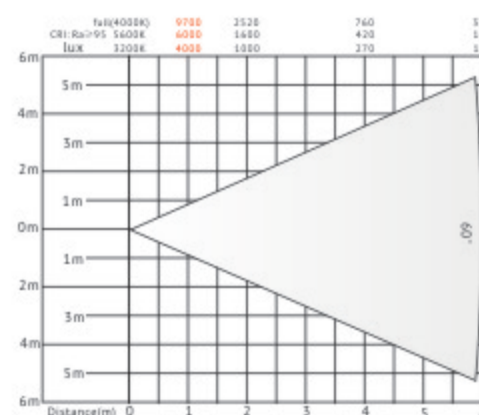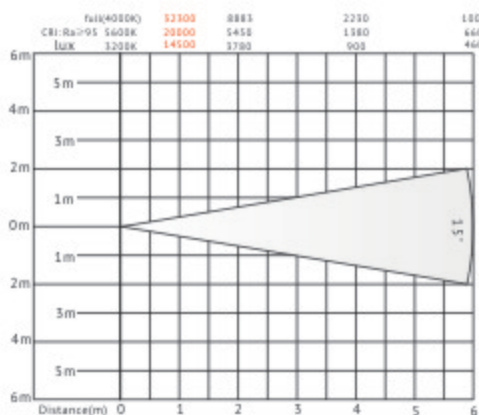[illegible]



Specification

Product model	VG-PB200W-C/VG-PB200W-C-D/VG-PB400W-C
Light sources	200W/400W bi-color high CRI COB LED Lamp
Input power	AC100-240V, 50/60Hz
Power	250W
CRI	Ra≥95, or Ra≥97
Color temp.	3200K-5600K every color 100W/3200K-5600K every color 200W
Dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons
DMX channel	5CH, 6CH
Beam angle	15-60degree, manual zoom or motorize zoom
Cooling system	Copper tube convector
Control mode	DMX512/Demo/Manual
IP rating	IP 20
Accessories	Barn doors, power cable, signal cable
Net weight	7.5kg
Body size	455*265*292mm

Features

- Equips 200W/400W bicolor brand high CRI high brightness LED chips, different power optional; The light output can keep 100W or 200W at different color temperature;
- Use large copper tube radiator as the main parts of cooling system, and digital temperature sensor to control the noise of mute fan within 38-45db which suit the international studio room environment standard;
- Use screw to adjust the different beam angle from spot(15degree) to flood(60degree), manual, motorize/DMX signal control the adjustment;
- Compact structure, beautiful appearance, unique, the housing, software, PCB and other inner structure is independent research and development by vangaa lighting;
- High CRI 95Ra or 97Ra optional, flicker free; 0-100% linear dimmer smoothly.

Effect

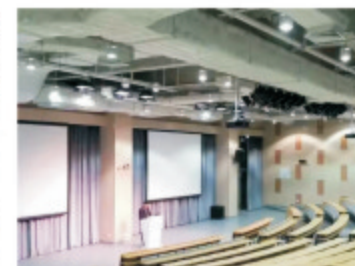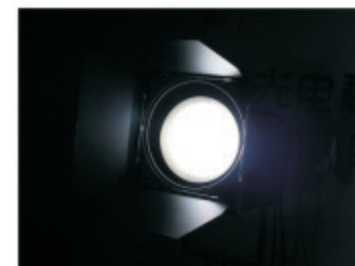

Manufacturing



Package



Application




Studio Room Noiseless LED Fresnel Spot Light(NO FAN)



Specification	
Product model	VG-PB100W-fanless/VG-PB100W-D-fanless
Light sources	100W high CRI COB LED Lamp
Input power	AC100-240V, 50/60Hz
Power	100W
CRI	Ra $\geq$ 95, or Ra $\geq$ 97
Color temp.	3200K/5600K
Dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons
DMX channel	1CH, 2CH
Beam angle	15-60degree, manual zoom/motorize zoom
Cooling system	Copper tube convector(no any fan)
Control mode	DMX512/Demo/Manual
IP rating	IP 20
Accessories	Barn doors, power cable, signal cable
Net weight	8.5kg
Body size	455*265*292mm



Product details

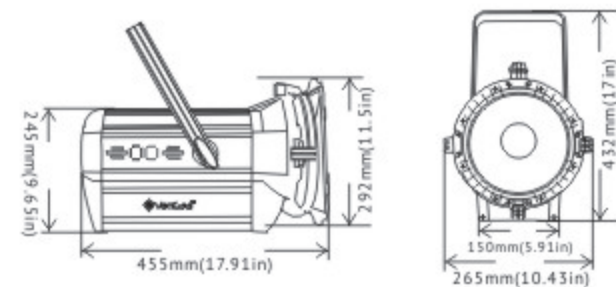

VG-PB100W-Fanless DMX Channel




VG-PB100W-D-Fanless DMX Channel

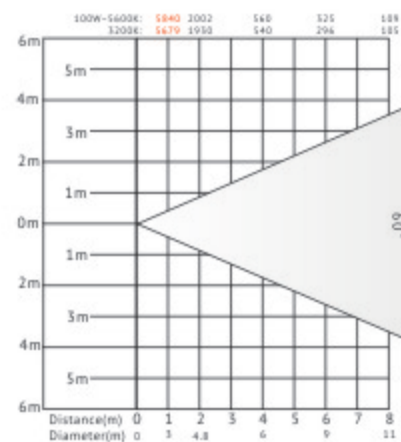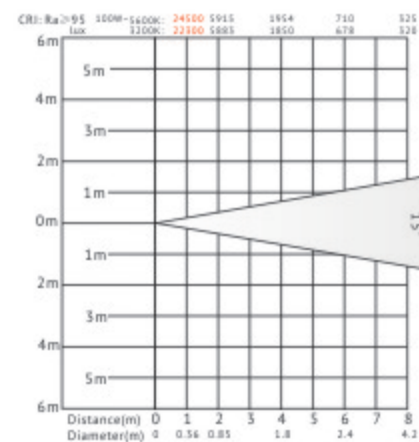

Features

- Equips 100W brand high CRI high brightness LED chips, small size can suitable for small space studio room;
- Use large copper tube radiator as the main parts of cooling system, no any fan inside of the light which can make sure the light is silent. This light can used for the scene which has very strict of noise;
- Use screw to adjust the different beam angle from spot(15degree) to flood(60degree), manual, or motorize/DMX signal control the adjustment;
- Compact structure, beautiful appearance, unique, the housing, software, PCB and other inner structure is independent research and development by vangaa lighting;
- High CRI 95Ra or 97Ra optional, flicker free; 0-100% linear dimmer smoothly.

Effect

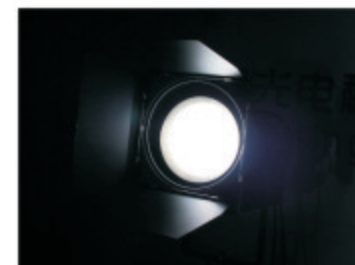

Manufacturing



Package



Application



400W LED Fresnel Spot Light



Specification

Product model	VG-PL400G	VG-PL400W
Light sources	400W RGBAL 5in1 LED lamp	400W high CRI COB LED Lamp
Input power	AC100-240V, 50/60Hz	AC100-240V, 50/60Hz
Power	450W	450W
CRI	/	Ra≥92, or Ra≥95
Color	RGBAL 5in1 color mixing	3200K/5600K
Dimmer	0-100% linear dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons	LCD display+4 buttons
DMX channel	12CH	4CH
Beam angle	15-65degree, manual zoom	15-65degree, manual zoom
Cooling system	Copper tube convector+mute fan	Copper tube convector+mute fan
Control mode	DMX512/Demo/Manual	DMX512/Demo/Manual
IP rating	IP 20	IP 20
Accessories	Barn doors, power cable, signal cable	Barn doors, power cable, signal cable
Net weight	13kg	13kg
Body size	407*337*312mm	407*337*312mm



Color Correction 200W LED Fresnel Spot Light











Specification

Product model	VG-PL250W
Light sources	200W high CRI COB LED Lamp
Input power	AC100-240V, 50/60Hz
Power	250W
CRI	Ra≥92
Color temp.	3200K/5600K
Dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons
DMX channel	4CH
Beam angle	15-65degree, manual zoom
Cooling system	Copper tube convector
Control mode	RDM, DMX512, Color correction
IP rating	IP 20
Accessories	Barn doors, power cable, signal cable
Net weight	6.5kg
Body size	546*346*270mm

Product details

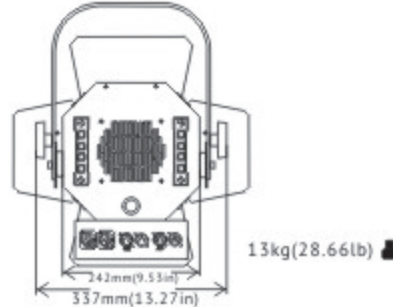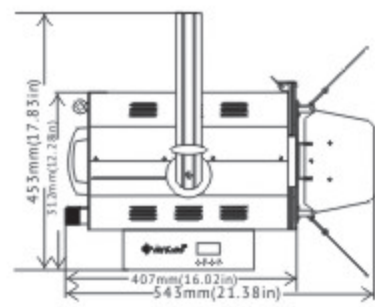

Product details

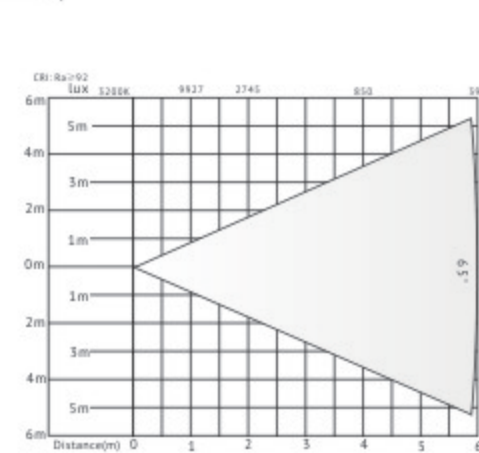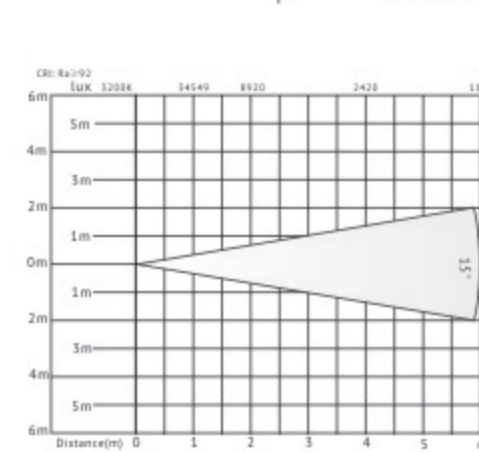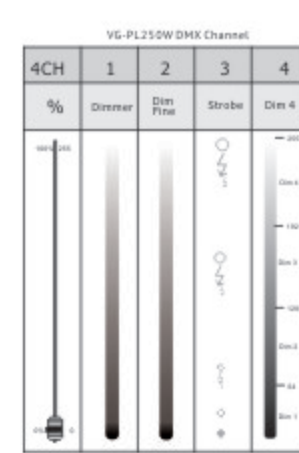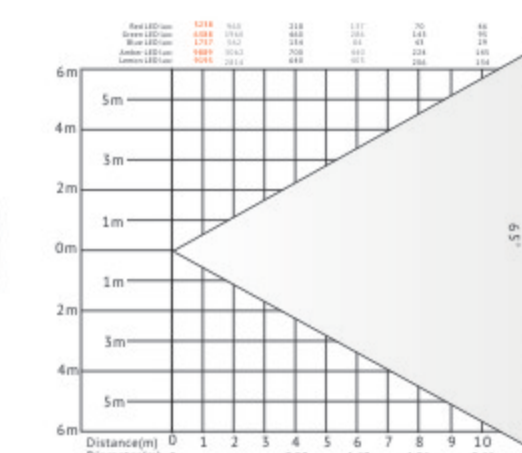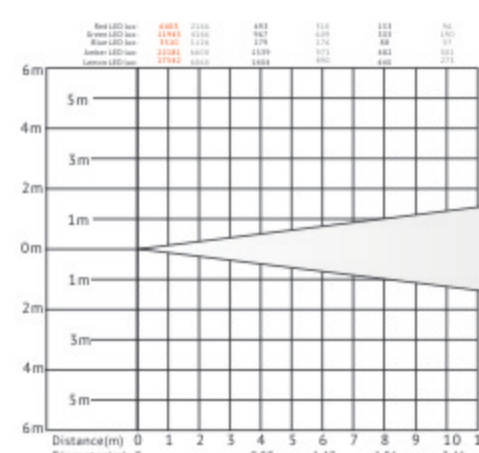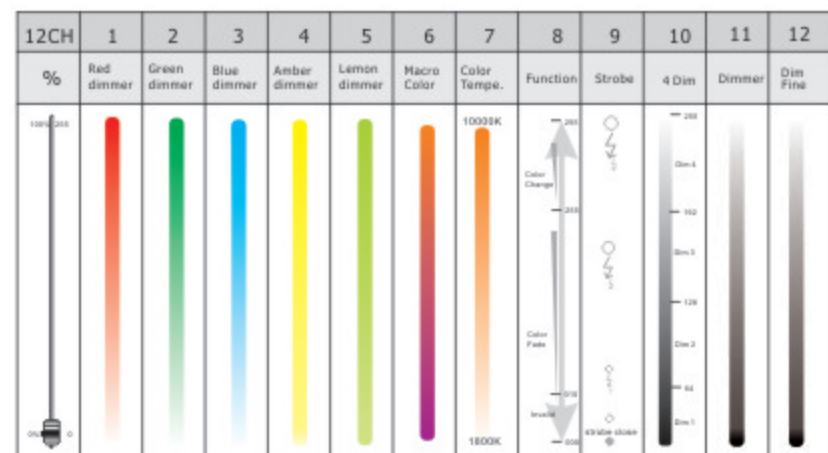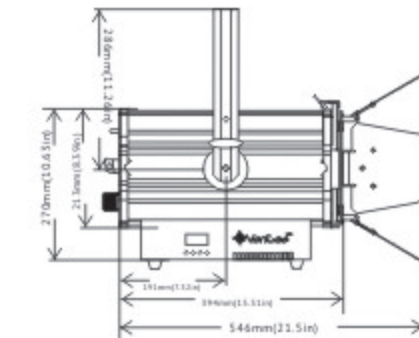

Manual Zoom LED Fresnel Spot Light



Specification	
Product model	VG-PB200D
Light sources	200W RGBW 4in1 COB LED Lamp
Input power	AC100-240V, 50/60Hz
Power	220W
CRI	/
Color	RGBW 4in1 color mixing
Dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons
DMX channel	9CH
Beam angle	15-60degree, manual zoom
Cooling system	Copper tube convector+mute fan
Control mode	DMX512/Demo/Manual
IP rating	IP 20
Accessories	Barn doors, power cable, signal cable
Net weight	8kg
Body size	455*265*292mm

Product details




9CH	1	2	3	4	5	6	7	8	9
%	General dimmer	Red dimmer	Green dimmer	Blue dimmer	White dimmer	Strobe	Preset color	Macro function	Speed
100% 200									
0% 0									




Color Correction 200W LED Fresnel Spot Light



Specification	
Product model	VG-PL250D
Light sources	200W RGBW 4in1 LED lamp
Input power	AC100-240V, 50/60Hz
Power	250W
CRI	/
Color temp.	RGBW color mixing
Dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons
DMX channel	11CH
Beam angle	15-65degree, manual zoom
Cooling system	Copper tube convector
Control mode	RDM, DMX512, Color correction
IP rating	IP 20
Accessories	Barn doors, power cable, signal cable
Net weight	7kg
Body size	546*346*270mm

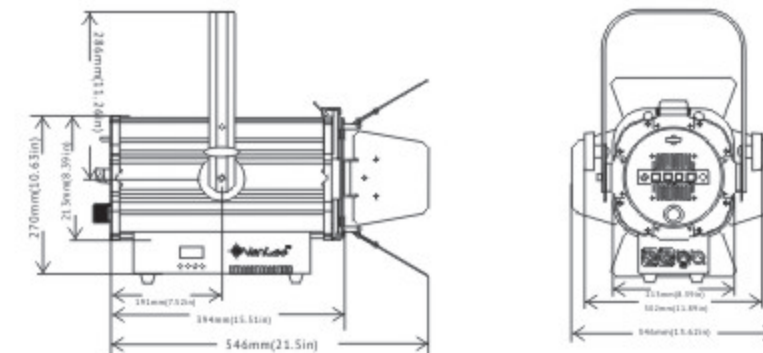

VG-PL250D DMX Channel										
11CH	1	2	3	4	5	6	7	8	9	10
%	Red dimmer	Green dimmer	Blue dimmer	White dimmer	Macro Color	Color Temp.	Function	Strobe	4 Dim	Dimmer
100% 200										
0% 0										


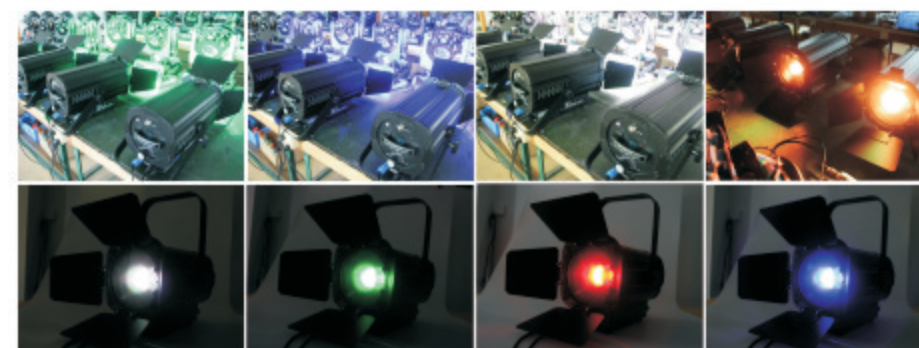


Fixed Lens LED Ellipsoidal Spotlight




Specification		
Product model	VG-LVF400A/VG-LVF220A	VG-LVF400G/VG-LVF220D
Light sources	400W/200W high CRI COB LED Lamp	400W RGBAL 5in1/200W RGBW 4in1 LED lamp
Input power	AC100-240V, 50/60Hz	AC100-240V, 50/60Hz
Power	450W/250W	450W/250W
CRI	Ra≥92	/
Color temp.	3200K/5600K optional	RGBAL/RGBW color mixing
Dimmer	0-100% linear dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons	LCD display+4 buttons
DMX channel	4CH	12CH/11CH
Beam angle	14/19/26/36 degree	14/19/26/36 degree
Cooling system	Copper tube convactor+mute fan	Copper tube convactor+mute fan
Control mode	RDM, DMX512, Color correction	RDM, DMX512, Color correction
IP rating	IP 20	IP 20
Accessories	Gobo clip, color paper clip, cables	Gobo clip, color paper clip, cables
Net weight	11kg/10kg	11kg/10kg
Body size	589*302*265mm	589*302*265mm

Product details

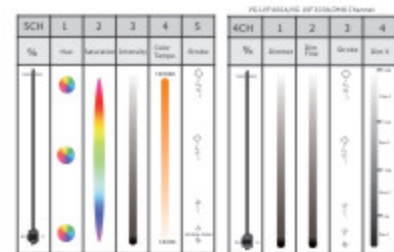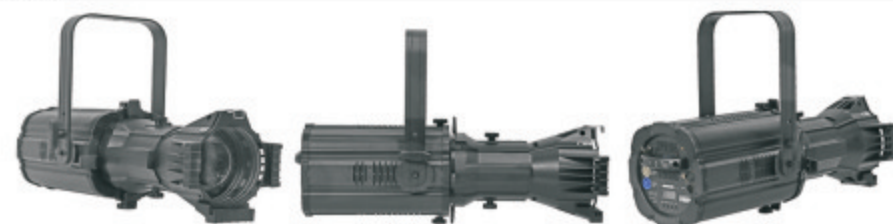

12CH	1	2	3	4	5	6	7	8	9	10	11	12
%	Red dimmer	Green dimmer	Blue dimmer	Amber dimmer	Ultraviolet dimmer	Purple dimmer	Color Temp.	Function	90°/360°	400W	Dimmer	Dimmer

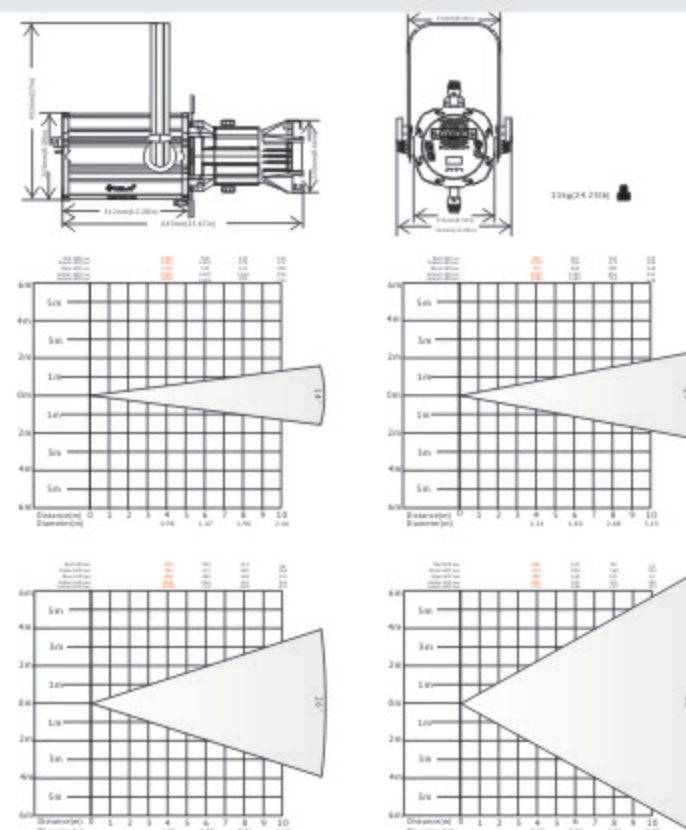

Features

- Brand 400W RGBAL 5in1 or 200W RGBW4in1 LED chips equips for this new designed LED profile spotlight, 5in1 RGB+Amber+Lemon can mix billions of different colors;
- The light use not only DMX 512 signal to control, but also the RDM technology. You can setting the ID address and checking the using situation on console easily;
- All the light will use the color correction test device to test, to make sure every color value are same although different manufacturing time;
- 1800K-10000K color temperature adjustable by DMX signal;
- 14, 19, 26, 36 degree different beam angle optional;
- 4 speed dimmer curve, 0-100% linear dimmer.

Effect



Manufacturing, Package & Event



Application







300W LED Profile Spot Light



Specification	
Product model	VG-LVF300A
Light sources	300W high CRI COB LED Lamp
Input power	AC100-240V, 50/60Hz
Power	350W
CRI	Ra $\geq$ 85 or Ra $\geq$ 92 optional
Color temp.	3200K/5600K optional
Dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons
DMX channel	2CH
Beam angle	19/26/36/50 degree
Cooling system	Copper tube convector
Control mode	DMX512, manual
IP rating	IP 20
Accessories	Gobo clip, color paper clip, cables
Net weight	10.5kg
Body size	684*360*536mm

Product details

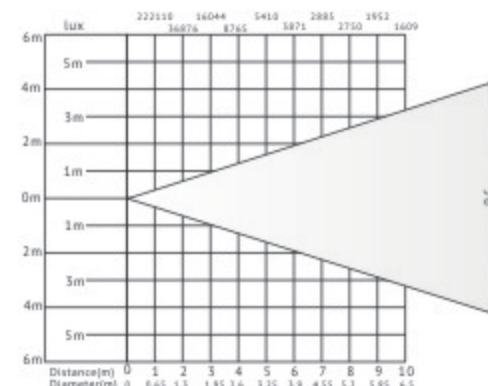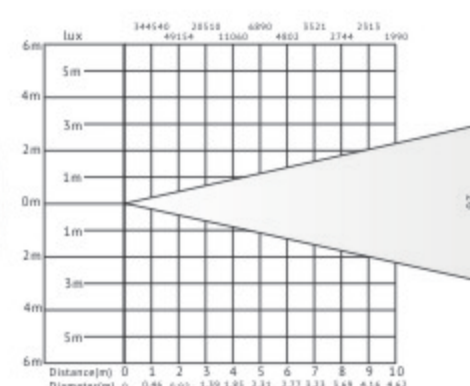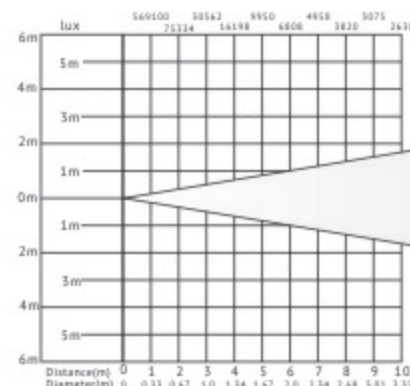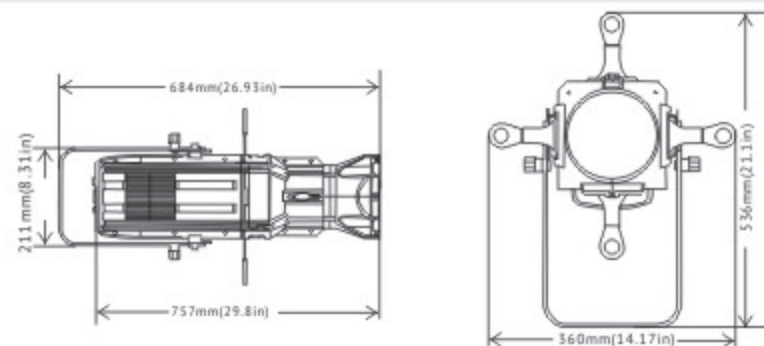

Die-casting Aluminum LED Profile Spot Light



Specification			
Product model	VG-LVF230A	VG-LVF230B	VG-LVF230C
Light sources	High CRI 200W COB LED	High CRI 200W COB LED	High CRI 200W COB LED
Input power	AC100-240V, 50/60Hz	AC100-240V, 50/60Hz	AC100-240V, 50/60Hz
Power	250W	250W	250W
CRI	Ra $\geq$ 95/Ra $\geq$ 97 optional	Ra $\geq$ 95/Ra $\geq$ 97 optional	/
Color	3200K/5600K optional	3000-6700K adjustable	RGBW 4in1
Dimmer	0-100% linear dimmer	0-100% linear dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons	LCD display+4 buttons	LCD display+4 buttons
DMX channel	2CH	4CH, 5CH	9CH
Beam angle	13/19/26/36degree optional	19/26/36/50 degree optional	19/26/36/50degree optional
Cooling system	Copper tube convector	Copper tube convector	Copper tube convector
Control mode	DMX512/Demo/Manual	DMX512/Demo/Manual	DMX512/Demo/Manual
IP rating	IP 20	IP 20	IP 20
Accessories	Gobo clip, power cable, signal cable	Gobo clip, power cable, signal cable	Gobo clip, power cable, signal cable
Net weight	8kg	8kg	8kg
Body size	670*170*292mm	670*170*292mm	670*170*292mm

Product details



Manufacturing in Workshop




ABS Housing LED Ellipsoidal Spotlight



Specification			
Product model	VG-LVF200A	VG-LVF200B	VG-LVF200C
Light sources	High CRI 200W COB LED	High CRI 200W COB LED	High CRI 200W COB LED
Input power	AC100-240V, 50/60Hz	AC100-240V, 50/60Hz	AC100-240V, 50/60Hz
Power	250W	250W	250W
CRI	Ra≥85/Ra≥95 optional	Ra≥85/Ra≥95 optional	Ra≥85/Ra≥95 optional
Color	3200K/5600K optional	3000-6700K adjustable	RGBW 4in1
Dimmer	0-100% linear dimmer	0-100% linear dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons	LCD display+4 buttons	LCD display+4 buttons
DMX channel	2CH	3CH	9CH
Beam angle	13/19/26/36degree optional	19/26/36/50 degree optional	19/26/36/50degree optional
Cooling system	Copper tube convector	Copper tube convector	Copper tube convector
Control mode	DMX512/Demo/Manual	DMX512/Demo/Manual	DMX512/Demo/Manual
IP rating	IP 20	IP 20	IP 20
Accessories	Gobo clip, power cable, signal cable	Gobo clip, power cable, signal cable	Gobo clip, power cable, signal cable
Net weight	6.4kg	6.4kg	6.4kg
Body size	660*360*465mm	660*360*465mm	660*360*465mm





Product details

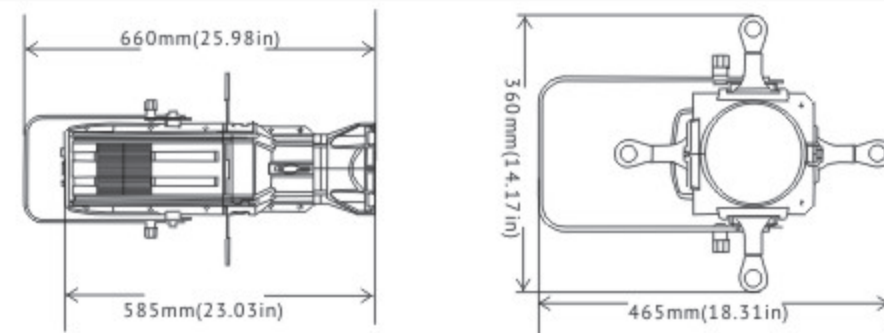

VG-LVF200A DMX Channel



VG-LVF200B DMX Channel

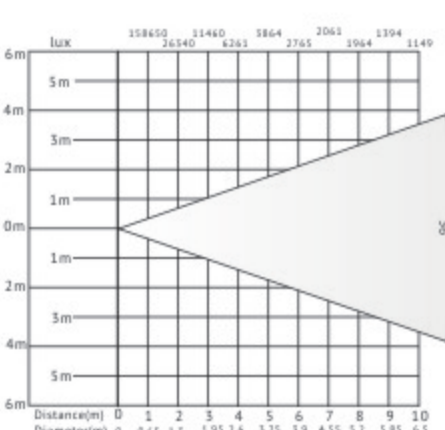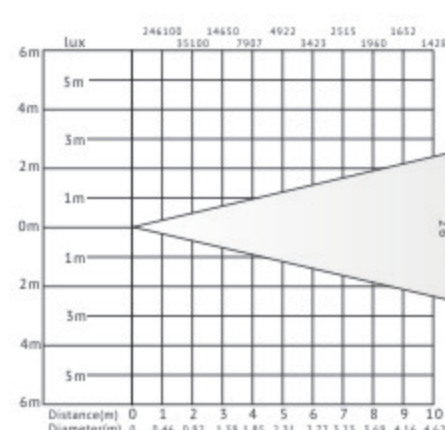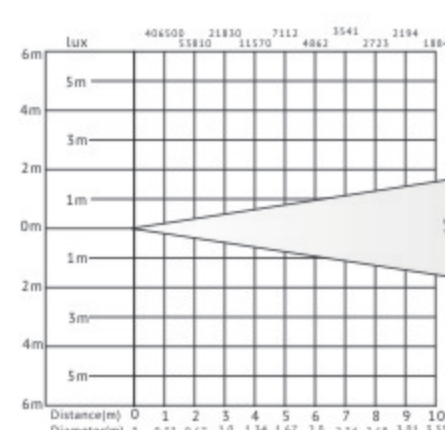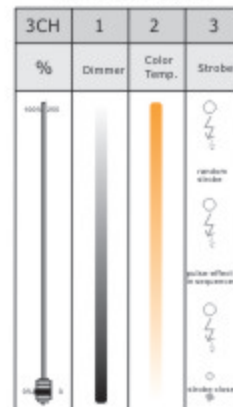

Features

- Equips ETC style high precision glass lens group, which make the light output is very clear, uniform. Can cut sharp margin spot or misty margin spot;
- Use high brightness high CRI brand LED chips as the light source, the light has very good output lux;
- Choose ABS as the housing materials, the light is very light, not very heavy for installation;
- 3200K, 5600K, Bicolor, or RGBW 4in1 different style are optional for different use scene;
- High CRI can reach 92Ra, 97Ra are optional;
- 19, 26, 36, 50 degree different beam angle optional;
- Very good cooling system, silent and powerful.

Accessories



gobo holder




color paper frame



iris

Effect



Manufacturing & Package



Application






LED Profile Spotlight



Specification		
Product model	VG-LVF150A	VG-LVF150C
Light sources	180W high CRI COB LED Lamp	180W RGBW 4in1 LED lamp
Input power	AC100-240V, 50/60Hz	AC100-240V, 50/60Hz
Power	200W	200W
CRI	Ra≥92	/
Color temp.	3200K/5600K optional	RGBW 4in1 color mixing
Dimmer	0-100% linear dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons	LCD display+4 buttons
DMX channel	3CH	9CH
Beam angle	19/26/36/50 degree	19/26/36/50 degree
Cooling system	Copper tube convactor	Copper tube convactor
Control mode	DMX512, manual	DMX512, manual
IP rating	IP 20	IP 20
Accessories	Gobo clip, color paper clip, cables	Gobo clip, color paper clip, cables
Net weight	7.5kg	7.5kg
Body size	645*260*250mm	645*260*250mm

Product details

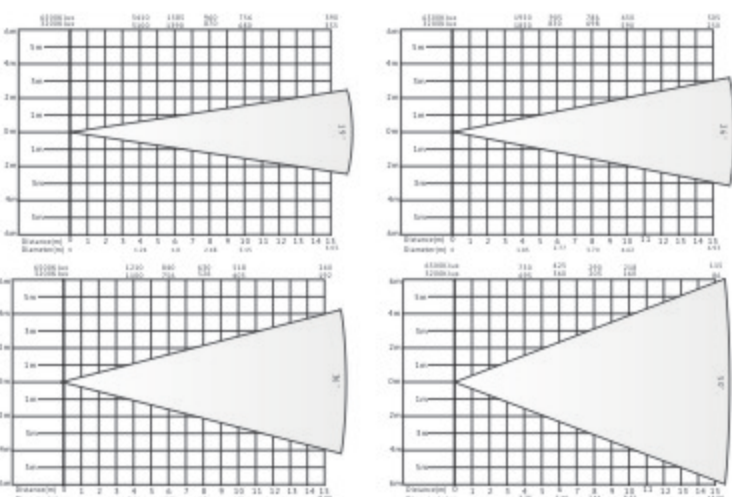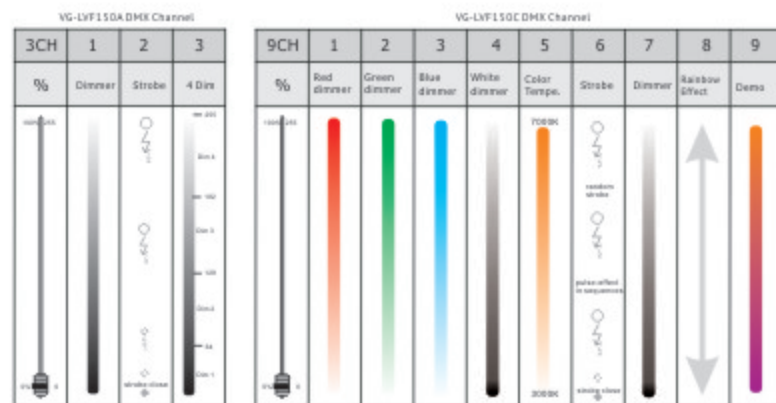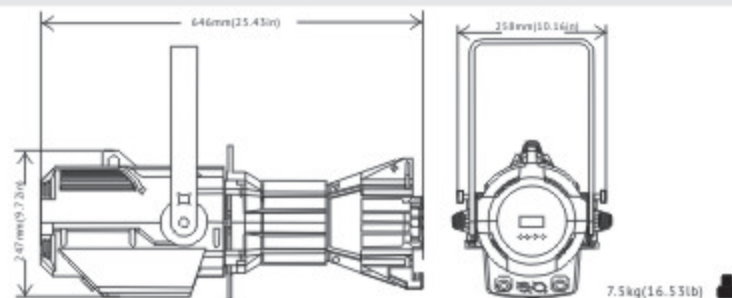

Features

- Equips high precision acrylic lens group, which make the light output is very soft and uniform.
- Can cut sharp margin spot or misty margin spot;
- Use high brightness high CRI brand LED chips as the light source, the light has very good output lux;
- Choose ABS as the housing materials, the light is very light, not very heavy for installation;
- 3200K, 5600K, Bicolor, or RGBW 4in1 different style are optional for different use scene;
- High CRI can reach 92Ra, flicker free which can suitable for video or photo taking;
- 19, 26, 36, 50 degree different beam angle optional;
- Very good cooling system, silent and powerful.

Accessories



gobo holder




color paper frame




iris

Effect



Manufacturing & Package



Application



200W LED Profile Spotlight



Specification

Product model	VG-LVF210A	VG-LVF210B	VG-LVF210C
Light sources	200W high CRI COB LED Lamp	200W bi-color LED Lamp	200W RGBW 4in1 COB LED Lamp
Input power	AC100-240V, 50/60Hz	AC100-240V, 50/60Hz	AC100-240V, 50/60Hz
Power	200W	200W	200W
CRI	Ra≥92	Ra≥92	/
Color temp.	3200K/5600K optional	3200K-5600K bi color	/
Dimmer	0-100% linear dimmer	0-100% linear dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons	LCD display+4 buttons	LCD display+4 buttons
DMX channel	3CH	5CH	9CH
Beam angle	19/26/36/50 degree	19/26/36/50 degree	19/26/36/50 degree
Cooling system	Copper tube convactor+mute fan	Copper tube convactor+mute fan	Copper tube convactor+mute fan
Control mode	DMX512, Color correction	DMX512, Color correction	DMX512, Color correction
IP rating	IP 20	IP 20	IP 20
Accessories	DMX Cable; Power cable	DMX Cable; Power cable	DMX Cable; Power cable
Net weight	8kg	8kg	8kg
Body size	648*194*194mm	648*194*194mm	648*194*194mm


MINI 60W Zoom LED Profile Spotlight




Specification

Product model	VG-LVF60Z
Light sources	High CRI 60W White COB LED
Input power	AC100-240V, 50/60Hz
Power	80W
CRI	>Ra92
Color	warm white/cold white
Dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons
DMX channel	3CH
Beam angle	15-35degree, manual zoom
Cooling system	Copper tube convactor+mute fan
Control mode	DMX512/Demo/ Manual
IP rating	IP 20
Accessories	Barn doors, power cable, signal cable
Net weight	3.5kg
Body size	350*180*160mm


Product details

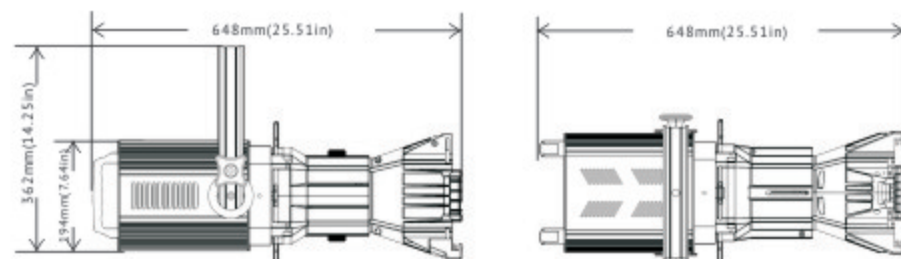





8kg(17.64lb)

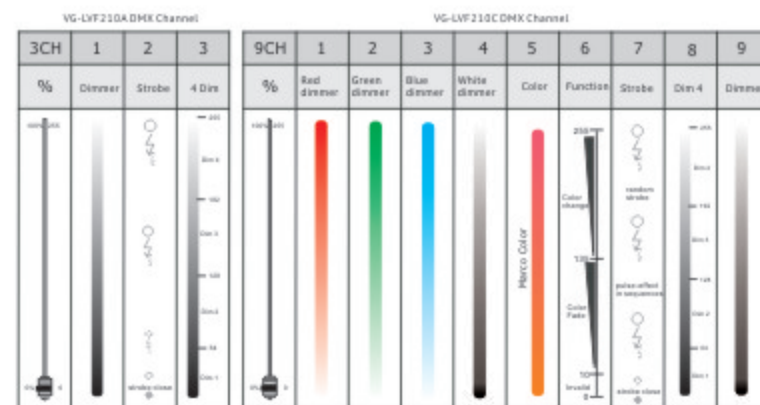

Product details

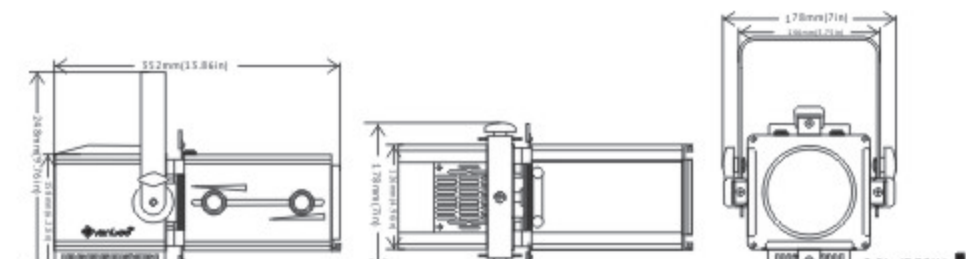

3.5kg(7.72lb)

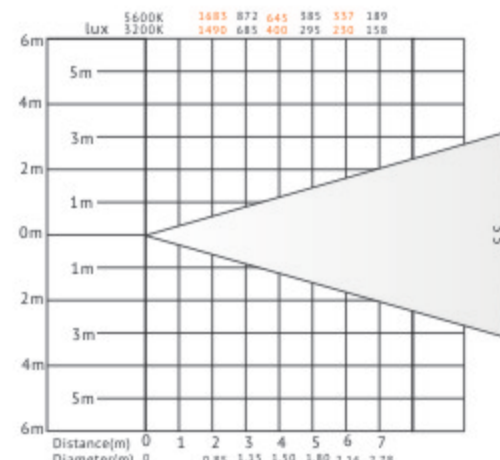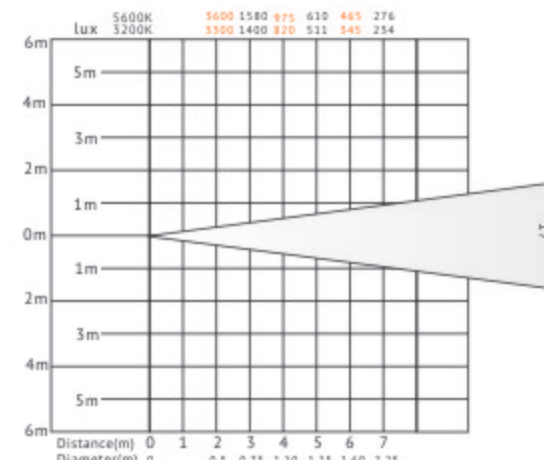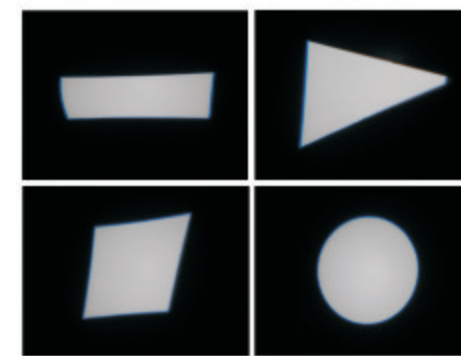
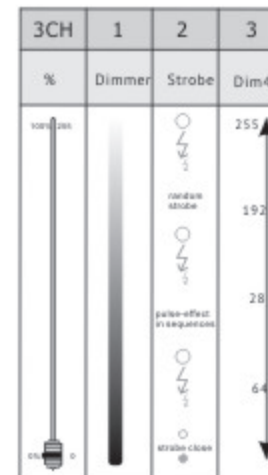


Zoom Lens LED Ellipsoidal Spotlight



Specification		
Product model	VG-LVF400Z-G-D/VG-LVF200Z-G-D	VG-LVF400Z-G/VG-LVF400Z/VG-LVF220Z-G
Light sources	400W/200W RGBAL high CRI COB LED Lamp	400W RGBAL 5in1/3200K/5600K/200W RGBAL 5in1 LED lamp
Input power	AC100-240V, 50/60Hz	AC100-240V, 50/60Hz
Power	450W/250W	450W/250W
CRI	Ra≥92	Ra≥92
Color temp.	1800-10000K	1800-10000K/3200K/5600K
Dimmer	0-100% linear dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons	LCD display+4 buttons
DMX channel	16CH	16CH/4CH/16CH
Beam angle	19-50 degree, motorize zoom	19-50 degree, manual zoom
Cooling system	Copper tube convector+mute fan	Copper tube convector+mute fan
Control mode	RDM, DMX512, Color correction	RDM, DMX512, Color correction
IP rating	IP 20	IP 20
Accessories	Gobo clip, color paper clip, cables	Gobo clip, color paper clip, cables
Net weight	13.5kg/12kg	13.5kg/12kg
Body size	648*340*213mm	648*340*213mm

Product details

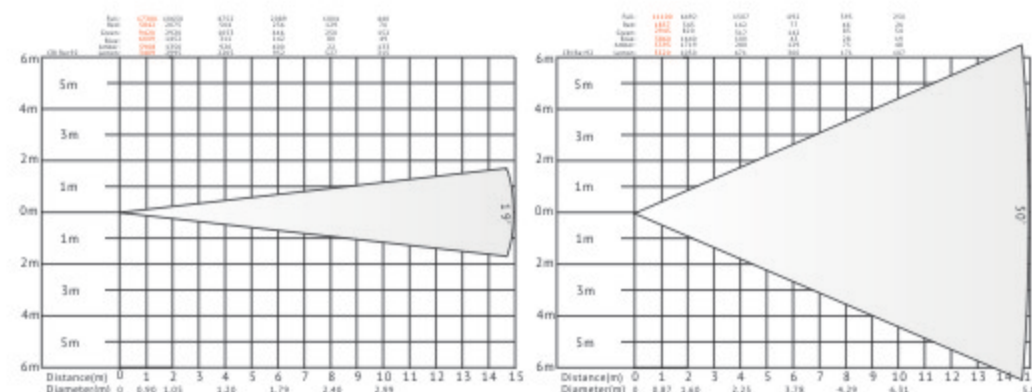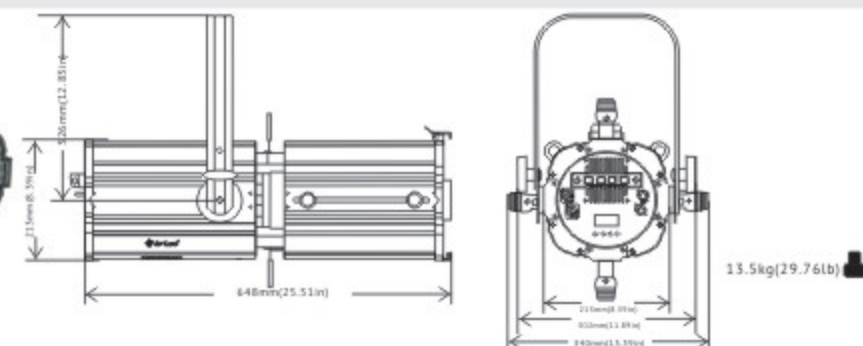


Features

- Brand 400W/200W RGBAL 5in1 LED chips equips for this new designed LED profile spotlight, 5in1 RGB+Amber+Lemon can mix billions of different colors;
- The light use not only DMX 512 signal to control, but also the RDM technology. You can setting the ID address and checking the using situation on console easily;
- All the light will use the color correction test device to test, to make sure every color value are same although different manufacturing time;
- 1800K-10000K color temperature adjustable by DMX signal;
- Motorize adjust to control the slice which can realize cut different shape by DMX signal remotely;
- 19-50 degree beam angle adjustable by manual, or by motorize;
- 4 speed dimmer curve, 0-100% linear dimmer.

Application



Effect

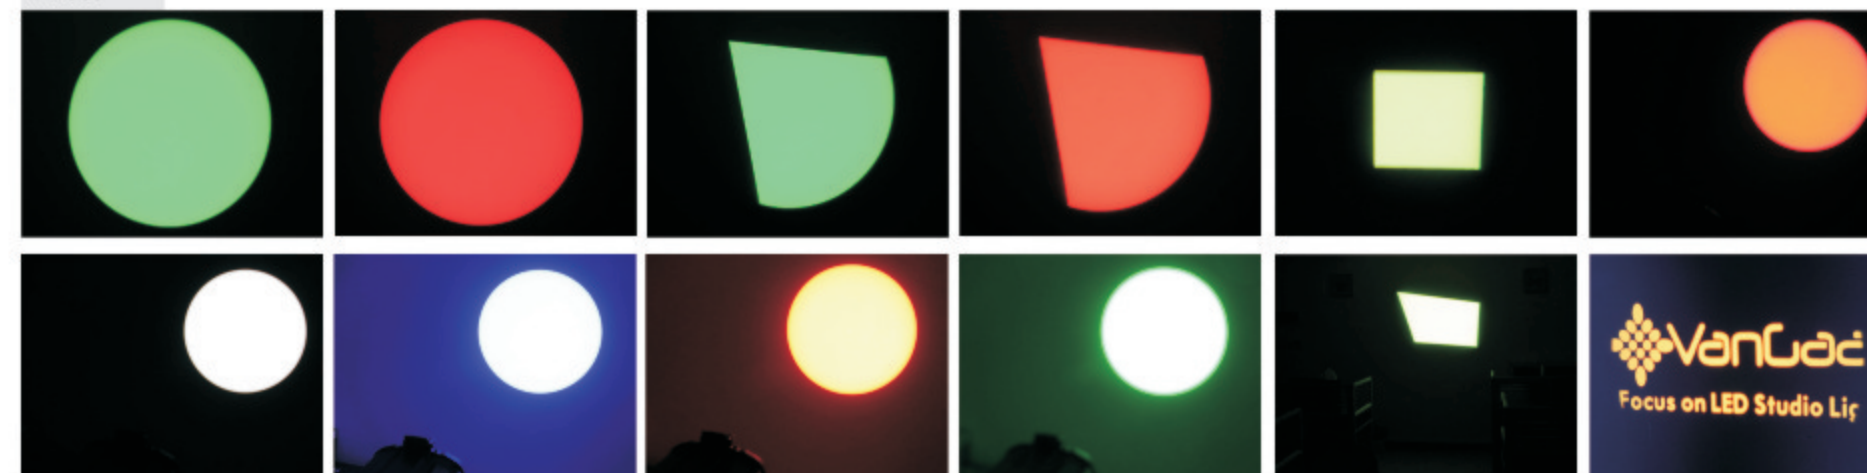

Manufacturing, Package & Event




Zoom Lens LED Ellipsoidal Spotlight





Specification			
Product model	VG-LVF300Z	VG-LVF200Z	VG-LVF160Z-B
Light sources	300W high CRI COB LED Lamp	200W high CRI COB LED Lamp	200W high CRI COB LED Lamp
Input power	AC100-240V, 50/60Hz	AC100-240V, 50/60Hz	AC100-240V, 50/60Hz
Power	350W	250W	250W
CRI	Ra≥92	Ra≥92	Ra≥92
Color temp.	3200K/5600K optional	3200K/5600K optional	3200K-5600K optional
Dimmer	0-100% linear dimmer	0-100% linear dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons	LCD display+4 buttons	LCD display+4 buttons
DMX channel	3CH	3CH	5CH
Beam angle	17-50 degree	17-50 degree	17-50 degree
Cooling system	Copper tube convactor	Copper tube convactor	Copper tube convactor
Control mode	DMX512, Color correction	DMX512, Color correction	DMX512, Color correction
IP rating	IP 20	IP 20	IP 20
Accessories	DMX Cable; Power cable	DMX Cable; Power cable	DMX Cable; Power cable
Net weight	10.5kg	10kg	10kg
Body size	618*194*200mm	618*194*200mm	618*194*200mm

Product details

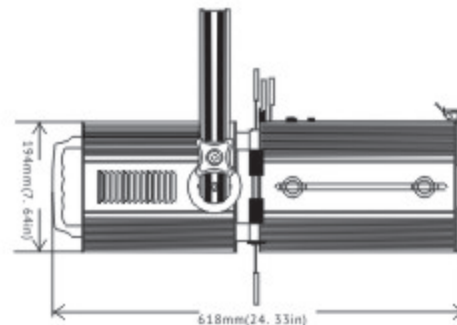

VG-LVF300Z/VG-LVF200Z DMX Channel				VG-LVF160Z-B DMX Channel					
3CH	1	2	3	5CH	1	2	3	4	5
%	Dimmer	Strobe	4 Dim	%	General Dimmer	Fixed Color Temp	WW Dimmer	CW Dimmer	Strobe
									</

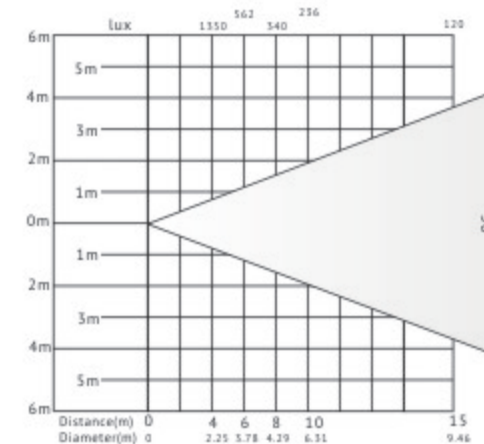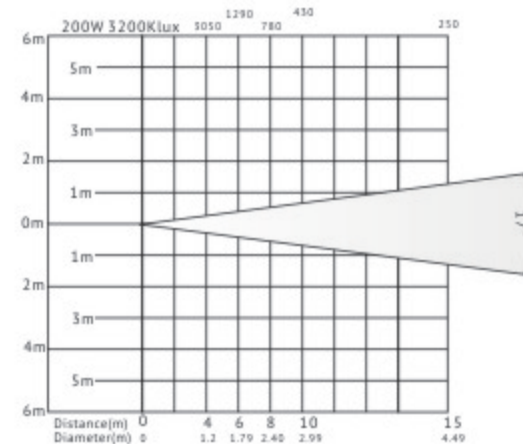



Features

- 200W, 300W different power led chips are optional for this light; Bi-color 200W is optional;
- This is the stable design light which is very cost performance;
- Manual control the slices which very easy cut different shape of light;
- 17-50 degree beam angle adjustable by manual, have manual focus function;
- 4 speed dimmer curve, 0-100% linear dimmer.

Application



Effect & Manufacturing




150W Colorful LED Video Film Sky Panel Light




Specification	
Product model	Color Panel 1440G
Light sources	480pcs 0.5W RGB 3in1 LEDs+480pcs 0.5W Warm White LEDs+480pcs 0.5W Cold White LEDs
Input power	AC100~240V, 50/60Hz; and DC24-36V
Light output	150W for every colors(Red, Green, Blue, Warm White and Cold White)keep similar brightness
CRI	Ra≥95
Color temp.	Kelvin 2500-9900K, DMX and Rotary Knob adjustable
Dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons
DMX channel	7CH(GEL Mode), 7CH(RGB Mode) and 4CH(White Mode)
Beam angle	120 degree(90° /60° honeycomb louver optional)
Cooling system	Copper tube convactor
Control mode	DMX512; RDM; Kelvin Temperature; Hue Angle; Saturation; Wireless Solution Receive
IP rating	IP 20
Accessories	DMX Cable; Power cable
Net weight	7.5kg
Body size	730*153*347mm

Product details

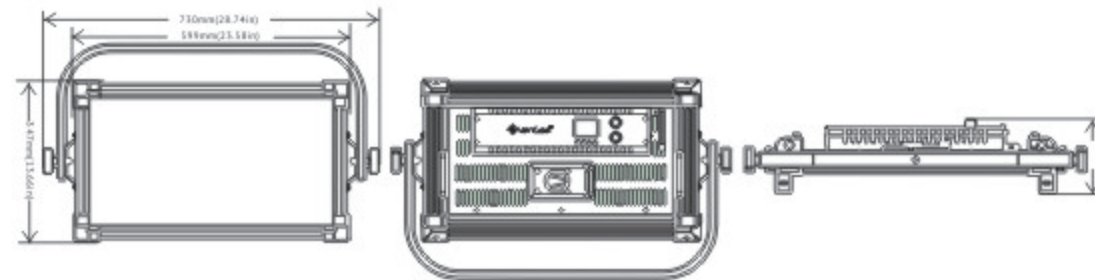

GEL/HUE Mode							RGB Color Mode							White Mode						
7CH	1	2	3	4	5	6	7	7CH	1	2	3	4	5	6	7	4CH	1	2	3	4
%	Dimmer	Dimmer fine	CCT (Kelvin)	G/W	GEL List	Hue angle	Saturation	%	Dimmer	Dimmer fine	CCT (Kelvin)	G/W	Red	Green	Blue	%	Dimmer	Dimmer fine	CCT (Kelvin)	G/W

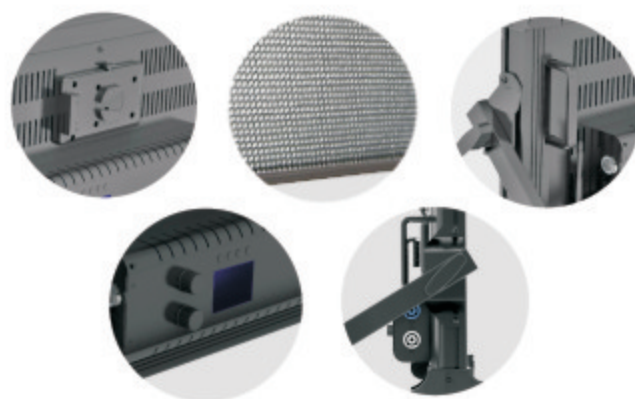

Features

- Use RGB, warm white and cold white as the basic light source, which can meet the request of different color for studio, film, video taking and other scene;
- The drive technology can realize different color have the similar output power when using. The light output can keep around 150W during using;
- High CRI more than 95Ra, flicker free, 0-100% linear dimmer;
- Kelvin 2500-9900K color temperature adjustable by DMX, RDM and rotary knob, very easy for using;
- Equips Wireless Solution Chips for signal receive, can remote control easily;
- Support DC24-36V different style battery.


Application



Optional Accessory



Barndoors



Honeycomb Louver



Battery(2h for full brightness)



Snap Grid




Tripods



Carry Bag

Different Color Effect



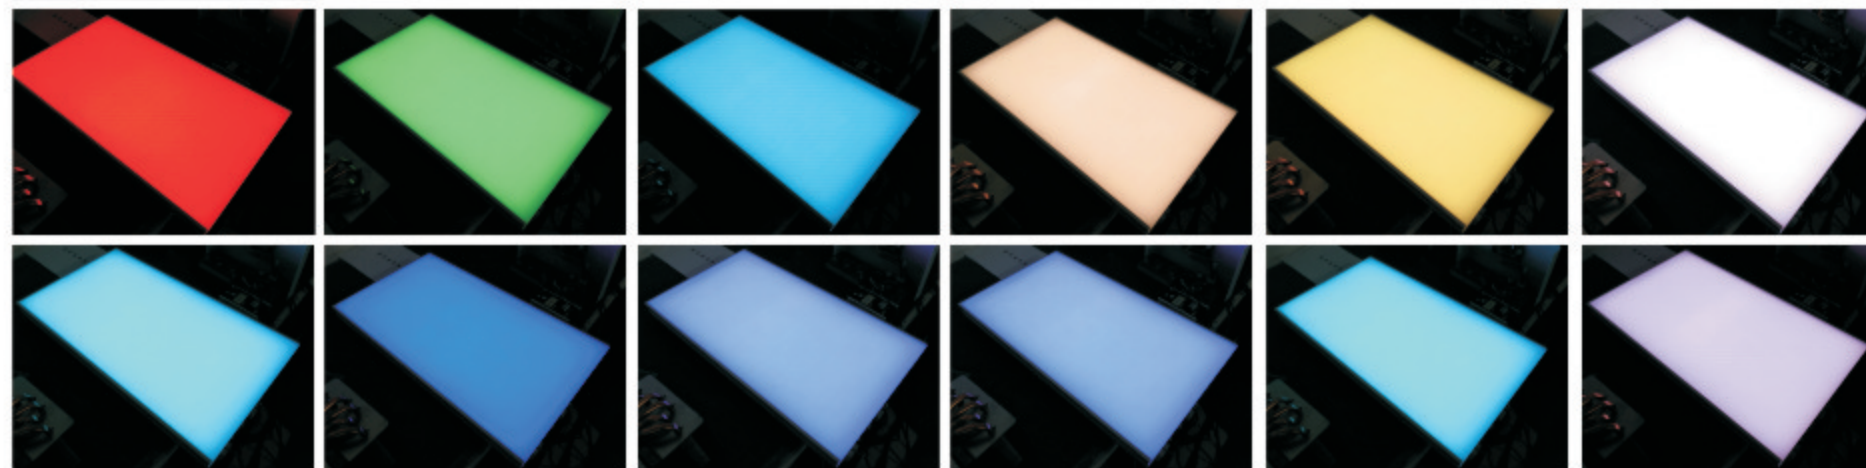


High Power LED Video Sky Panel Light



Specification		
Product model	VG-HTC1568C	VG-HTC1568
Light sources	1568pcs bi-color 0.2W led lamps	1568pcs 3200/5600K 0.2W led lamps
Input power	AC100-240V, 50/60Hz	AC100-240V, 50/60Hz
Power	200W	200W
CRI	Ra≥95/97	Ra≥95/97
Color temp.	3200K-5600K optional	3200K/5600K optional
Dimmer	0-100% linear dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons	LCD display+4 buttons
DMX channel	4CH/5CH	3CH/4CH
Beam angle	120 degree	120 degree
Cooling system	Copper tube convector	Copper tube convector
Control mode	DMX512, Master/slave, Auto-run	DMX512, Master/slave, Auto-run
IP rating	IP 20	IP 20
Accessories	Gobo clip, color paper clip, cables	Gobo clip, color paper clip, cables
Net weight	8.2kg	8.2kg
Body size	675*320*93mm	675*320*93mm

Product details

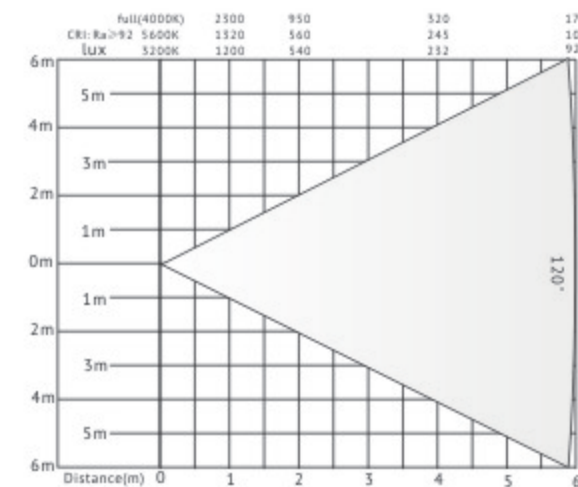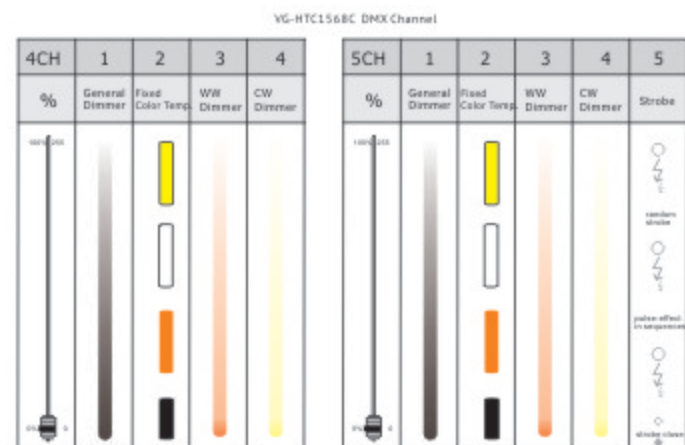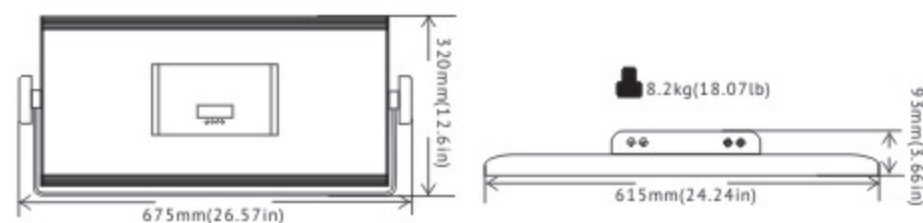

Features

- Bicolor, 3200K, 5600K are optional for this slim led sky panel video light;
- The drive technology can realize different color have the similar output power when using. The light output can keep around 170W during using;
- High CRI more than 95Ra(97 optional), flicker free, 0-100% linear dimmer;
- The light without any fan, silent for studio room using;
- Slim appearance, compact structure, unique design style.

Application



Effect & Manufacturing




LED Soft Video Sky Panel Light



Specification		
Product model	VG-HTC1200C	VG-HTC630
Light sources	1200pcs 0.2W high CRI LED	630pcs 0.2W high CRI LED
Input power	AC100-240V, 50/60Hz	AC100-240V, 50/60Hz
Power	120W	120W
CRI	Ra≥95	Ra≥92; or Ra≥97
Color temp.	3200K-5600K adjustable	3200K/5600K optional
Dimmer	0-100% linear dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons	LCD display+4 buttons
DMX channel	4CH/5CH	1CH/2CH
Beam angle	120 degree	120 degree
Cooling system	Natural cooling, no fan	Natural cooling, no fan
Control mode	DMX512/Demo/Manual	DMX512/Demo/Manual
IP rating	IP 20	IP 20
Accessories	Barndoor; DMX and Power cable	Barndoor; DMX and Power cable
Net weight	5.5kg	5.5kg
Body size	570*265*109mm	570*265*109mm

Product details

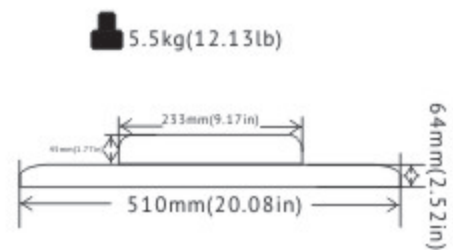

LED Soft Video Sky Panel Light



Specification		
Product model	VG-HTC490C	VG-HTC490
Light sources	1200pcs bi-color 0.2W led lamps	1200pcs 3200K/5600K 0.2W led lamps
Input power	AC100-240V, 50/60Hz	AC100-240V, 50/60Hz
Power	200W	200W
CRI	Ra≥95	Ra≥95
Color temp.	3200K-5600K adjustable	3200K/5600K optional
Dimmer	0-100% linear dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons	LCD display+4 buttons
DMX channel	4CH/5CH	1CH/2CH
Beam angle	120 degree	120 degree
Cooling system	Natural cooling, no fan	Natural cooling, no fan
Control mode	DMX512, Master/slave, Auto-run	DMX512, Master/slave, Auto-run
IP rating	IP 20	IP 20
Accessories	Barndoor; DMX cable; Power cable	Barndoor; DMX cable; Power cable
Net weight	9kg	8.2kg
Body size	480*270*127mm	480*270*127mm





Product details



LED Soft Video Sky Panel Light



Product details

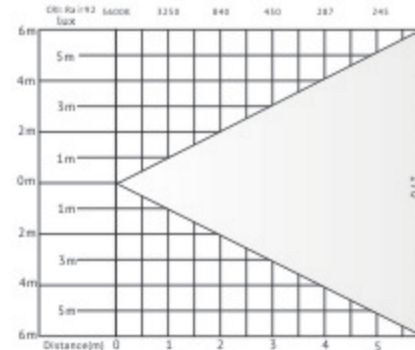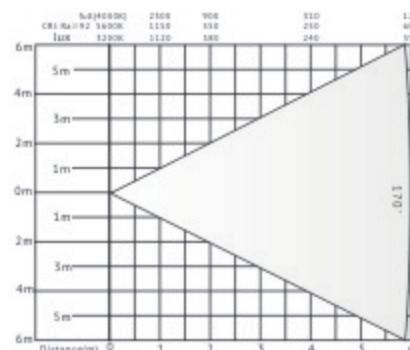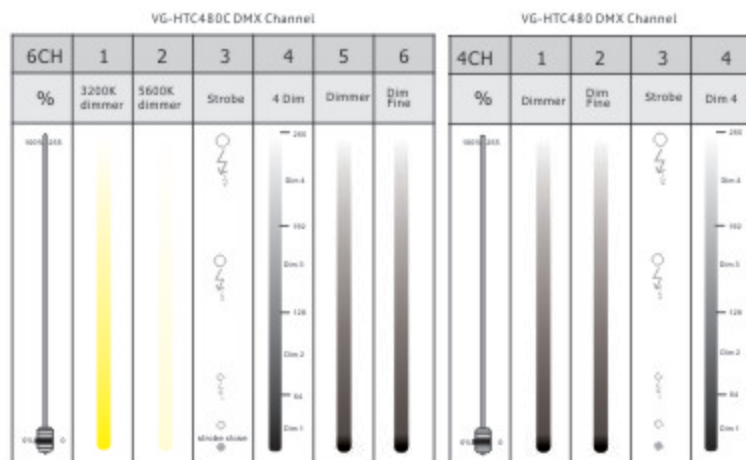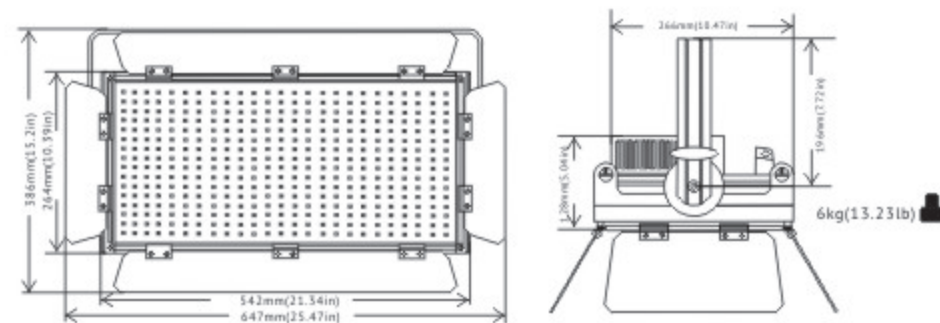

LED Film Video Sky Panel Light Series



Specification	VG-HTC480C	VG-HTC480	VG-HTC480D
Product model	VG-HTC480C	VG-HTC480	VG-HTC480D
Light sources	240pcs 0.5W 3200K and 240pcs 0.5W 5600K LEDs	480pcs 0.5W 3200K/5600K high CRI LED	480pcs 0.5W RGBW 4in1 LED Chips
Input power	AC100-240V, 50/60Hz	AC100-240V, 50/60Hz	AC100-240V, 50/60Hz
Power	200W	200W	200W
CRI	Ra≥90	Ra≥90	/
Color temp.	3200K-5600K adjustable	3200K/5600K optional	1800K-10000K optional
Dimmer	0-100% linear dimmer	0-100% linear dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons	LCD display+4 buttons	LCD display+4 buttons
DMX channel	6CH	4CH	11CH
Beam angle	170 degree	170 degree	170 degree
Cooling system	Natural cooling, no fan	Natural cooling, no fan	Natural cooling, no fan
Control mode	DMX512/Demo/Manual	DMX512/Demo/Manual	DMX512/Demo/Manual
IP rating	IP 20	IP 20	IP 20
Accessories	Barndoor; DMX and Power cable	Barndoor; DMX and Power cable	Barndoor; DMX and Power cable
Net weight	6kg	6kg	6kg
Body size	542*266*128mm	542*266*128mm	542*266*128mm

Features

- Bicolor, 3200K, 5600K, RGBW 4in1 are optional for this slim led sky panel video light;
- Use intelligent software, can realize 1800K-10000K color temperature adjustable
- High CRI more than 92Ra(95 optional), flicker free, 0-100% linear dimmer with 4 speed dimmer curve;
- The light without any fan, silent for studio room using;
- Slim appearance, compact structure, unique design style.

Effect & Manufacturing



LED Film Video Sky Panel Light Series



Application



High Power LED Cyclorama Light



LED Cyclorama Light Series



Specification		
Product model	VG-LB1300L	VG-LB1300C
Light sources	100pcs 3W high brightness LED Lamps, (warm white: 52; cold white: 48)	100pcs seven colors brand led lamps, (R:24; G:18; B:12; Royal blue: 8; Cyan: 8; Amber: 12; Lime green: 20)
Input power	AC100-240V, 50/60Hz	AC100-240V, 50/60Hz
Power	300W	300W
CRI	Ra≥95	Ra≥90
Color temp.	3200K-5600K adjustable	2700-8000K adjustable
Dimmer	0-100% linear dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons	LCD display+4 buttons
DMX channel	9CH	7CH/9CH/11CH/15CH/17CH/22CH
Beam angle	30/25/15 degree	30/25/15 degree
Cooling system	Copper tube convactor + mute fan	Copper tube convactor + mute fan
Control mode	DMX512/Demo/Manual	DMX512/Demo/Manual
IP rating	IP 20	IP 20
Accessories	DMX and Power cable	Barndoor; DMX and Power cable
Net weight	9.5kg	9.5kg
Body size	630*180*260mm	630*180*260mm



Features

- Equips brand 7 colors led chips, can mix different color for theater using, bicolor one is optional;
- Use intelligent software, can realize 2700K-8000K color temperature adjustable;
- High CRI more than 92Ra(95 optional), flicker free, 0-100% linear dimmer;
- 200W powerful led cyclorama light which can suitable for different scene of theater and others;
- Compact structure, unique design style;
- Equips import different degree optics, 10/30/80 different degree optional.

Application



Product details

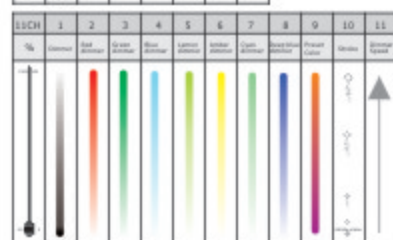

There are HSIC 7CH, SSP 11CH, TOUR 14CH, TOUR 22CH, PIXEL 9CH, PIXEL 17CH options



Effect, Manufacturing & Package



LED Cyclorama Light Series



Color Correction 400W LED Cyclorama Light



LED Cyclorama Light Series

Specification	
Product model	VG-LB2600
Light sources	200pcs seven colors brand led lamps, (R:48; G:32; B:24; Royal blue: 16; Cyan: 16; Amber: 24; Lime green: 40)
Input power	AC100-240V, 50/60Hz
Power	400W
CRI	Ra≥97
Color quality	>90, from 2700K-8000K
Color range	>1670 thousand colors
Color mixing system	HSIC(brightness/hue/saturability/color temperature)
Control panel	LCD display+4 buttons
DMX channel	7CH/9CH/11CH/15CH/17CH/22CH
Cooling system	mute fan
Beam angle	30° for first head, 80° for second head, motorzile adjust the head
IP rating	IP 20
Accessories	Barndoor; DMX cable; Power cable
Net weight	15kg
Body size	D617*W310*H328mm







108x3W LED Cyclorama Light



LED Cyclorama Light Series

Specification	
Product model	VG-LB1083
Light sources	108pcs 3W LED lamps
Input power	AC100-240V, 50/60Hz
Power	350W
Quantity of LED	R: 27; G: 27; B: 27; W: 27
Life span of LED	50000h
Dimmer	0-100% linear dimmer
Control panel	digital display+4 buttons
DMX channel	8CH
Beam angle	60°120degree
Cooling system	High quality radiator, fan without noise
Control mode	DMX512/Demo/Manual
IP rating	IP 20
Accessories	Barn doors, power cable, signal cable
Net weight	8.5kg
Body size	480*270*127mm

Product details




There are 11CH 7CH 5CH 11CH 15CH 17CH 22CH 26CH 32CH 36CH 40CH 48CH 56CH 64CH 72CH 80CH 88CH 96CH 104CH 112CH 120CH 128CH 136CH 144CH 152CH 160CH 168CH 176CH 184CH 192CH 200CH 208CH 216CH 224CH 232CH 240CH 248CH 256CH 264CH 272CH 280CH 288CH 296CH 304CH 312CH 320CH 328CH 336CH 344CH 352CH 360CH 368CH 376CH 384CH 392CH 400CH 408CH 416CH 424CH 432CH 440CH 448CH 456CH 464CH 472CH 480CH 488CH 496CH 504CH 512CH 520CH 528CH 536CH 544CH 552CH 560CH 568CH 576CH 584CH 592CH 600CH 608CH 616CH 624CH 632CH 640CH 648CH 656CH 664CH 672CH 680CH 688CH 696CH 704CH 712CH 720CH 728CH 736CH 744CH 752CH 760CH 768CH 776CH 784CH 792CH 800CH 808CH 816CH 824CH 832CH 840CH 848CH 856CH 864CH 872CH 880CH 888CH 896CH 904CH 912CH 920CH 928CH 936CH 944CH 952CH 960CH 968CH 976CH 984CH 992CH 1000CH 1008CH 1016CH 1024CH 1032CH 1040CH 1048CH 1056CH 1064CH 1072CH 1080CH 1088CH 1096CH 1104CH 1112CH 1120CH 1128CH 1136CH 1144CH 1152CH 1160CH 1168CH 1176CH 1184CH 1192CH 1200CH 1208CH 1216CH 1224CH 1232CH 1240CH 1248CH 1256CH 1264CH 1272CH 1280CH 1288CH 1296CH 1304CH 1312CH 1320CH 1328CH 1336CH 1344CH 1352CH 1360CH 1368CH 1376CH 1384CH 1392CH 1400CH 1408CH 1416CH 1424CH 1432CH 1440CH 1448CH 1456CH 1464CH 1472CH 1480CH 1488CH 1496CH 1504CH 1512CH 1520CH 1528CH 1536CH 1544CH 1552CH 1560CH 1568CH 1576CH 1584CH 1592CH 1600CH 1608CH 1616CH 1624CH 1632CH 1640CH 1648CH 1656CH 1664CH 1672CH 1680CH 1688CH 1696CH 1704CH 1712CH 1720CH 1728CH 1736CH 1744CH 1752CH 1760CH 1768CH 1776CH 1784CH 1792CH 1800CH 1808CH 1816CH 1824CH 1832CH 1840CH 1848CH 1856CH 1864CH 1872CH 1880CH 1888CH 1896CH 1904CH 1912CH 1920CH 1928CH 1936CH 1944CH 1952CH 1960CH 1968CH 1976CH 1984CH 1992CH 2000CH 2008CH 2016CH 2024CH 2032CH 2040CH 2048CH 2056CH 2064CH 2072CH 2080CH 2088CH 2096CH 2104CH 2112CH 2120CH 2128CH 2136CH 2144CH 2152CH 2160CH 2168CH 2176CH 2184CH 2192CH 2200CH 2208CH 2216CH 2224CH 2232CH 2240CH 2248CH 2256CH 2264CH 2272CH 2280CH 2288CH 2296CH 2304CH 2312CH 2320CH 2328CH 2336CH 2344CH 2352CH 2360CH 2368CH 2376CH 2384CH 2392CH 2400CH 2408CH 2416CH 2424CH 2432CH 2440CH 2448CH 2456CH 2464CH 2472CH 2480CH 2488CH 2496CH 2504CH 2512CH 2520CH 2528CH 2536CH 2544CH 2552CH 2560CH 2568CH 2576CH 2584CH 2592CH 2600CH 2608CH 2616CH 2624CH 2632CH 2640CH 2648CH 2656CH 2664CH 2672CH 2680CH 2688CH 2696CH 2704CH 2712CH 2720CH 2728CH 2736CH 2744CH 2752CH 2760CH 2768CH 2776CH 2784CH 2792CH 2800CH 2808CH 2816CH 2824CH 2832CH 2840CH 2848CH 2856CH 2864CH 2872CH 2880CH 2888CH 2896CH 2904CH 2912CH 2920CH 2928CH 2936CH 2944CH 2952CH 2960CH 2968CH 2976CH 2984CH 2992CH 3000CH 3008CH 3016CH 3024CH 3032CH 3040CH 3048CH 3056CH 3064CH 3072CH 3080CH 3088CH 3096CH 3104CH 3112CH 3120CH 3128CH 3136CH 3144CH 3152CH 3160CH 3168CH 3176CH 3184CH 3192CH 3200CH 3208CH 3216CH 3224CH 3232CH 3240CH 3248CH 3256CH 3264CH 3272CH 3280CH 3288CH 3296CH 3304CH 3312CH 3320CH 3328CH 3336CH 3344CH 3352CH 3360CH 3368CH 3376CH 3384CH 3392CH 3400CH 3408CH 3416CH 3424CH 3432CH 3440CH 3448CH 3456CH 3464CH 3472CH 3480CH 3488CH 3496CH 3504CH 3512CH 3520CH 3528CH 3536CH 3544CH 3552CH 3560CH 3568CH 3576CH 3584CH 3592CH 3600CH 3608CH 3616CH 3624CH 3632CH 3640CH 3648CH 3656CH 3664CH 3672CH 3680CH 3688CH 3696CH 3704CH 3712CH 3720CH 3728CH 3736CH 3744CH 3752CH 3760CH 3768CH 3776CH 3784CH 3792CH 3800CH 3808CH 3816CH 3824CH 3832CH 3840CH 3848CH 3856CH 3864CH 3872CH 3880CH 3888CH 3896CH 3904CH 3912CH 3920CH 3928CH 3936CH 3944CH 3952CH 3960CH 3968CH 3976CH 3984CH 3992CH 4000CH 4008CH 4016CH 4024CH 4032CH 4040CH 4048CH 4056CH 4064CH 4072CH 4080CH 4088CH 4096CH 4104CH 4112CH 4120CH 4128CH 4136CH 4144CH 4152CH 4160CH 4168CH 4176CH 4184CH 4192CH 4200CH 4208CH 4216CH 4224CH 4232CH 4240CH 4248CH 4256CH 4264CH 4272CH 4280CH 4288CH 4296CH 4304CH 4312CH 4320CH 4328CH 4336CH 4344CH 4352CH 4360CH 4368CH 4376CH 4384CH 4392CH 4400CH 4408CH 4416CH 4424CH 4432CH 4440CH 4448CH 4456CH 4464CH 4472CH 4480CH 4488CH 4496CH 4504CH 4512CH 4520CH 4528CH 4536CH 4544CH 4552CH 4560CH 4568CH 4576CH 4584CH 4592CH 4600CH 4608CH 4616CH 4624CH 4632CH 4640CH 4648CH 4656CH 4664CH 4672CH 4680CH 4688CH 4696CH 4704CH 4712CH 4720CH 4728CH 4736CH 4744CH 4752CH 4760CH 4768CH 4776CH 4784CH 4792CH 4800CH 4808CH 4816CH 4824CH 4832CH 4840CH 4848CH 4856CH 4864CH 4872CH 4880CH 4888CH 4896CH 4904CH 4912CH 4920CH 4928CH 4936CH 4944CH 4952CH 4960CH 4968CH 4976CH 4984CH 4992CH 5000CH 5008CH 5016CH 5024CH 5032CH 5040CH 5048CH 5056CH 5064CH 5072CH 5080CH 5088CH 5096CH 5104CH 5112CH 5120CH 5128CH 5136CH 5144CH 5152CH 5160CH 5168CH 5176CH 5184CH 5192CH 5200CH 5208CH 5216CH 5224CH 5232CH 5240CH 5248CH 5256CH 5264CH 5272CH 5280CH 5288CH 5296CH 5304CH 5312CH 5320CH 5328CH 5336CH 5344CH 5352CH 5360CH 5368CH 5376CH 5384CH 5392CH 5400CH 5408CH 5416CH 5424CH 5432CH 5440CH 5448CH 5456CH 5464CH 5472CH 5480CH 5488CH 5496CH 5504CH 5512CH 5520CH 5528CH 5536CH 5544CH 5552CH 5560CH 5568CH 5576CH 5584CH 5592CH 5600CH 5608CH 5616CH 5624CH 5632CH 5640CH 5648CH 5656CH 5664CH 5672CH 5680CH 5688CH 5696CH 5704CH 5712CH 5720CH 5728CH 5736CH 5744CH 5752CH 5760CH 5768CH 5776CH 5784CH 5792CH 5800CH 5808CH 5816CH 5824CH 5832CH 5840CH 5848CH 5856CH 5864CH 5872CH 5880CH 5888CH 5896CH 5904CH 5912CH 5920CH 5928CH 5936CH 5944CH 5952CH 5960CH 5968CH 5976CH 5984CH 5992CH 6000CH 6008CH 6016CH 6024CH 6032CH 6040CH 6048CH 6056CH 6064CH 6072CH 6080CH 6088CH 6096CH 6104CH 6112CH 6120CH 6128CH 6136CH 6144CH 6152CH 6160CH 6168CH 6176CH 6184CH 6192CH 6200CH 6208CH 6216CH 6224CH 6232CH 6240CH 6248CH 6256CH 6264CH 6272CH 6280CH 6288CH 6296CH 6304CH 6312CH 6320CH 6328CH 6336CH 6344CH 6352CH 6360CH 6368CH 6376CH 6384CH 6392CH 6400CH 6408CH 6416CH 6424CH 6432CH 6440CH 6448CH 6456CH 6464CH 6472CH 6480CH 6488CH 6496CH 6504CH 6512CH 6520CH 6528CH 6536CH 6544CH 6552CH 6560CH 6568CH 6576CH 6584CH 6592CH 6600CH 6608CH 6616CH 6624CH 6632CH 6640CH 6648CH 6656CH 6664CH 6672CH 6680CH 6688CH 6696CH 6704CH 6712CH 6720CH 6728CH 6736CH 6744CH 6752CH 6760CH 6768CH 6776CH 6784CH 6792CH 6800CH 6808CH 6816CH 6824CH 6832CH 6840CH 6848CH 6856CH 6864CH 6872CH 6880CH 6888CH 6896CH 6904CH 6912CH 6920CH 6928CH 6936CH 6944CH 6952CH 6960CH 6968CH 6976CH 6984CH 6992CH 7000CH 7008CH 7016CH 7024CH 7032CH 7040CH 7048CH 7056CH 7064CH 7072CH 7080CH 7088CH 7096CH 7104CH 7112CH 7120CH 7128CH 7136CH 7144CH 7152CH 7160CH 7168CH 7176CH 7184CH 7192CH 7200CH 7208CH 7216CH 7224CH 7232CH 7240CH 7248CH 7256CH 7264CH 7272CH 7280CH 7288CH 7296CH 7304CH 7312CH 7320CH 7328CH 7336CH 7344CH 7352CH 7360CH 7368CH 7376CH 7384CH 7392CH 7400CH 7408CH 7416CH 7424CH 7432CH 7440CH 7448CH 7456CH 7464CH 7472CH 7480CH 7488CH 7496CH 7504CH 7512CH 7520CH 7528CH 7536CH 7544CH 7552CH 7560CH 7568CH 7576CH 7584CH 7592CH 7600CH 7608CH 7616CH 7624CH 7632CH 7640CH 7648CH 7656CH 7664CH 7672CH 7680CH 7688CH 7696CH 7704CH 7712CH 7720CH 7728CH 7736CH 7744CH 7752CH 7760CH 7768CH 7776CH 7784CH 7792CH 7800CH 7808CH 7816CH 7824CH 7832CH 7840CH 7848CH 7856CH 7864CH 7872CH 7880CH 7888CH 7896CH 7904CH 7912CH 7920CH 7928CH 7936CH 7944CH 7952CH 7960CH 7968CH 7976CH 7984CH 7992CH 8000CH 8008CH 8016CH 8024CH 8032CH 8040CH 8048CH 8056CH 8064CH 8072CH 8080CH 8088CH 8096CH 8104CH 8112CH 8120CH 8128CH 8136CH 8144CH 8152CH 8160CH 8168CH 8176CH 8184CH 8192CH 8200CH 8208CH 8216CH 8224CH 8232CH 8240CH 8248CH 8256CH 8264CH 8272CH 8280CH 8288CH 8296CH 8304CH 8312CH 8320CH 8328CH 8336CH 8344CH 8352CH 8360CH 8368CH 8376CH 8384CH 8392CH 8400CH 8408CH 8416CH 8424CH 8432CH 8440CH 8448CH 8456CH 8464CH 8472CH 8480CH 8488CH 8496CH 8504CH 8512CH 8520CH 8528CH 8536CH 8544CH 8552CH 8560CH 8568CH 8576CH 8584CH 8592CH 8600CH 8608CH 8616CH 8624CH 8632CH 8640CH 8648CH 8656CH 8664CH 8672CH 8680CH 8688CH 8696CH 8704CH 8712CH 8720CH 8728CH 8736CH 8744CH 8752CH 8760CH 8768CH 8776CH 8784CH 8792CH 8800CH 8808CH 8816CH 8824CH 8832CH 8840CH 8848CH 8856CH 8864CH 8872CH 8880CH 8888CH 8896CH 8904CH 8912CH 8920CH 8928CH 8936CH 8944CH 8952CH 8960CH 8968CH 8976CH 8984CH 8992CH 9000CH 9008CH 9016CH 9024CH 9032CH 9040CH 9048CH 9056CH 9064CH 9072CH 9080CH 9088CH 9096CH 9104CH 9112CH 9120CH 9128CH 9136CH 9144CH 9152CH 9160CH 9168CH 9176CH 9184CH 9192CH 9200CH 9208CH 9216CH 9224CH 9232CH 9240CH 9248CH 9256CH 9264CH 9272CH 9280CH 9288CH 9296CH 9304CH 9312CH 9320CH 9328CH 9336CH 9344CH 9352CH 9360CH 9368CH 9376CH 9384CH 9392CH 9400CH 9408CH 9416CH 9424CH 9432CH 9440CH 9448CH 9456CH 9464CH 9472CH 9480CH 9488CH 9496CH 9504CH 9512CH 9520CH 9528CH 9536CH 9544CH 9552CH 9560CH 9568CH 9576CH 9584CH 9592CH 9600CH 9608CH 9616CH 9624CH 9632CH 9640CH 9648CH 9656CH 9664CH 9672CH 9680CH 9688CH 9696CH 9704CH 9712CH 9720CH 9728CH 9736CH 9744CH 9752CH 9760CH 9768CH 9776CH 9784CH 9792CH 9800CH 9808CH 9816CH 9824CH 9832CH 9840CH 9848CH 9856CH 9864CH 9872CH 9880CH 9888CH 9896CH 9904CH 9912CH 9920CH 9928CH 9936CH 9944CH 9952CH 9960CH 9968CH 9976CH 9984CH 9992CH 10000CH 10008CH 10016CH 10024CH 10032CH 10040CH 10048CH 10056CH 10064CH 10072CH 10080CH 10088CH 10096CH 10104CH 10112CH 10120CH 10128CH 10136CH 10144CH 10152CH 10160CH 10168CH 10176CH 10184CH 10192CH 10200CH 10208CH 10216CH 10224CH 10232CH 10240CH 10248CH 10256CH 10264CH 10272CH 10280CH 10288CH 10296CH 10304CH 10312CH 10320CH 10328CH 10336CH 10344CH 10352CH 10360CH 10368CH 10376CH 10384CH 10392CH 10400CH 10408CH 10416CH 10424CH 10432CH 10440CH 10448CH 10456CH 10464CH 10472CH 10480CH 10488CH 10496CH 10504CH 10512CH 10520CH 10528CH 10536CH 10544CH 10552CH 10560CH 10568CH 10576CH 10584CH 10592CH 10600CH 10608CH 10616CH 10624CH 10632CH 10640CH 10648CH 10656CH 10664CH 10672CH 10680CH 10688CH 10696CH 10704CH 10712CH 10720CH 10728CH 10736CH 10744CH 10752CH 10760CH 10768CH 10776CH 10784CH 10792CH 10800CH 10808CH 10816CH 10824CH 10832CH 10840CH 10848CH 10856CH 10864CH 10872CH 10880CH 10888CH 10896CH 10904CH 10912CH 10920CH 10928CH 10936CH 10944CH 10952CH 10960CH 10968CH 10976CH 10984CH 10992CH 11000CH 11008CH 11016CH 11024CH 11032CH 11040CH 11048CH 11056CH 11064CH 11072CH 11080CH 11088CH 11096CH 11104CH 11112CH 11120CH 11128CH 11136CH 11144CH 11152CH 11160CH 11168CH 11176CH 11184CH 11192CH 11200CH 11208CH 11216CH 11224CH 11232CH 11240CH 11248CH 11256CH 11264CH 11272CH 11280CH 11288CH 11296CH 11304CH 11312CH 11320CH 11328CH 11336CH 11344CH 11352CH 11360CH 11368CH 11376CH 11384CH 11392CH 11400CH 11408CH 11416CH 11424CH 11432CH 11440CH 11448CH 11456CH 11464CH 11472CH 11480CH 11488CH 11496CH 11504CH 11512CH 11520CH 11528CH 11536CH 11544CH 11552CH 11560CH 11568CH 11576CH 11584CH 11592CH 11600CH 11608CH 11616CH 11624CH 11632CH 11640CH 11648CH 11656CH 11664CH 11672CH 11680CH 11688CH 11696CH 11704CH 11712CH 11720CH 11728CH 11736CH 11744CH 11752CH 11760CH 11768CH 11776CH 11784CH 11792CH 11800CH 11808CH 11816CH 11824CH 11832CH 11840CH 11848CH 11856CH 11864CH 11872CH 11880CH 11888CH 11896CH 11904CH 11912CH 11920CH 11928CH 11936CH 11944CH 11952CH 11960CH 11968CH 11976CH 11984CH 11992CH 12000CH 12008CH 12016CH 12024CH 12032CH 12040CH 12048CH 12056CH 12064CH 12072CH 12080CH 12088CH 12096CH 12104CH 12112CH 12120CH 12128CH 12136CH 12144CH 12152CH 12160CH 12168CH 12176CH 12184CH 12192CH 12200CH 12208CH 12216CH 12224CH 12232CH 12240CH 12248CH 12256CH 12264CH 12272CH 12280CH 12288CH 12296CH 12304CH 12312CH 12320CH 12328CH 12336CH 12344CH 12352CH 12360CH 12368CH 12376CH 12384CH 12392CH 12400CH 12408CH 12416CH 12424CH 12432CH 12440CH 12448CH 12456CH 12464CH 12472CH 12480CH 12488CH 12496CH 12504CH 12512CH 12520CH 12528CH 12536CH 12544CH 12552CH 12560CH 12568CH 12576CH 12584CH 12592CH 12600CH 12608CH 12616CH 12624CH 12632CH 12640CH 12648CH 12656CH 12664CH 12672CH 12680CH 12688CH 12696CH 12704CH 12712CH 12720CH 12728CH 12736CH 12744CH 12752CH 12760CH 12768CH 12776CH 12784CH 12792CH 12800CH 12808CH 12816CH 12824CH 12832CH 12840CH 12848CH 12856CH 12864CH 12872CH 12880CH 12888CH 12896CH 12904CH 12912CH 12920CH 12928CH 12936CH 12944CH 12952CH 12960CH 12968CH 12976CH 12984CH 12992CH 13000CH 13008CH 13016CH 13024CH 13032CH 13040CH 13048CH 13056CH 13064CH 13072CH 13080CH 13088CH 13096CH 13104CH 13112CH 13120CH 13128CH 13136CH 13144CH 13152CH 13160CH 13168CH 13176CH 13184CH

300W CMY LED Moving Head Spot Beam Wash Light



Specification	
Product model	VG-LM300C
Light sources	300W High Output white 6000K COB LED lamp
Input power	AC90-240V, 50/60Hz
Power	450W
Light output	45200lux@4m, 11°, 4760lux@4m, 46°
Life span of LED	50000h
Zoom angle	11-46°
Dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons
DMX channel	25CH, 21CH
Working temp.	-25-+45℃
Cooling system	High quality mute fans
Control mode	DMX512/Master-slave/Auto-run/Sound active
IP rating	IP 20
Accessories	Hanging bridge, power cable, signal cable
Net weight	20kg
Body size	393Dx305Wx644Hmm

Product details

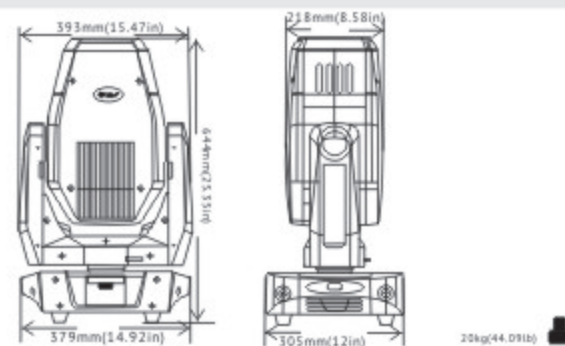


25CH	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
%	Pan	Pan fine	Tilt	Tilt fine	Pan/Tilt Speed	Dimmer	Dimmer Fine	Strobe	Cyan	Magenta	Yellow	Color 1	Color 2	Color 3	Static Gobo Wheel	Rotation Gobo Wheel	Rotation Gobo Wheel	Focus	Focus Fine	Zoom	Zoom Fine	Prism	Prism rotation	Iris	Frost
0-100%	0-360°	0-360°	0-120°	0-120°	0-100%	0-100%	0-100%	0-100%	0-100%	0-100%	0-100%	0-100%	0-100%	0-100%	0-100%	0-100%	0-100%	0-100%	0-100%	0-100%	0-100%	0-100%	0-100%	0-100%	0-100%
0-100%	0-360°	0-360°	0-120°	0-120°	0-100%	0-100%	0-100%	0-100%	0-100%	0-100%	0-100%	0-100%	0-100%	0-100%	0-100%	0-100%	0-100%	0-100%	0-100%	0-100%	0-100%	0-100%	0-100%	0-100%	0-100%



Features

- 300W LED with CMY function, real 4in1 lights with spot, beam and wash, can suitable different performance scenes;
- The CMY function can mix different billions of different true colors for your stage;
- 11-46degree zoom angle can meet the big scenes using, 3 face or 8 face prism optional;
- High quality LED chips has been used, you are not need change the lamp, the lifespan can reach 50000h;
- Atomization, zoom, prism, iris all the moving head function has been included, can make wonderful stage effect;
- Has 1pc static and 1pc rotation gobo whell, custom can customize the different gobo pattern design;
- The inside function modules are all aluminium design, the whole light is not very heavy.

Effect

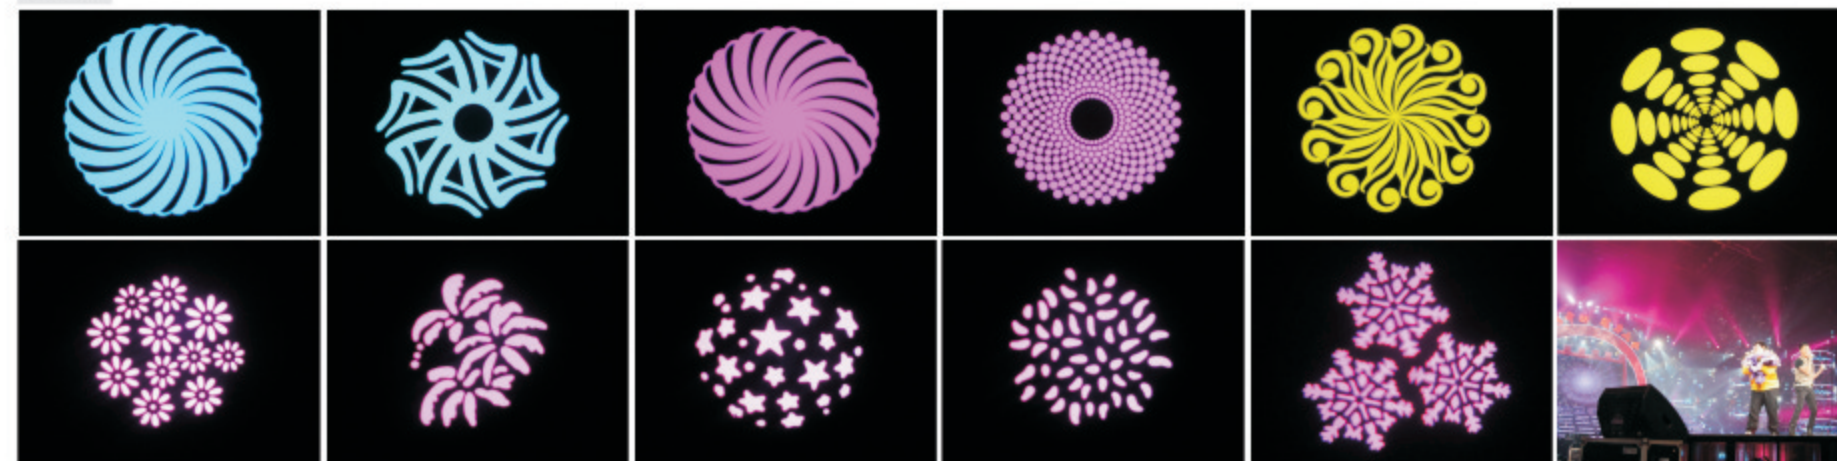

Manufacturing & Package



Application



200W 3in1 LED Moving Head Spot Beam Light



LED Moving Head Light Series

Specification	
Product model	VG-LM200C
Light sources	200W High Output white 7500K COB LED lamp
Input power	AC90-240V, 50/60Hz
Power	300W
Light output	25200lux@4m, 7°, 3260lux@4m, 21°
Life span of LED	50000h
Zoom angle	7-21°
Dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons
DMX channel	18CH
Working temp.	-25-+45°C
Cooling system	High quality mute fans
Control mode	DMX512/Master-slave/Auto-run/Sound active
IP rating	IP 20
Accessories	Hanging bridge, power cable, signal cable
Net weight	15.5kg
Body size	343Dx239Wx537Hmm


150W LED Moving Head Spot Light




LED Moving Head Light Series

Specification	
Product model	VG-LM150S
Light sources	150W High Output white COB LED lamp
Input power	AC90-240V, 50/60Hz
Power	250W
Light output	3450lux@5m, white color
Life span of LED	50000h
Beam angle	15degree, with focus function
Dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons
DMX channel	16/14/12/10CH
Working temp.	-25-+45°C
Cooling system	High quality mute fans
Control mode	DMX512/Master-slave/Auto-run/Sound active
IP rating	IP 20
Accessories	Hanging bridge, power cable, signal cable
Net weight	11.5kg
Body size	270*270*470mm


Product details

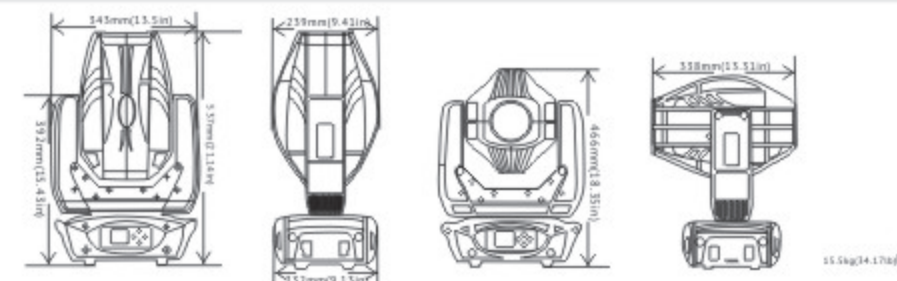


18CH	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
%	Pan	Pan fine	Tilt	Tilt fine	Pan/Tilt Speed	Dimmer	Strobe	Color wheel	Gobo wheel	Rotating gobo	Rotating gobo	Prism	Prism rotation	Focus	Zoom	Macro	Reset	
100%	0°	0°	0°	0°	0°	0°	0°	0°	0°	0°	0°	0°	0°	0°	0°	0°	0°	0°

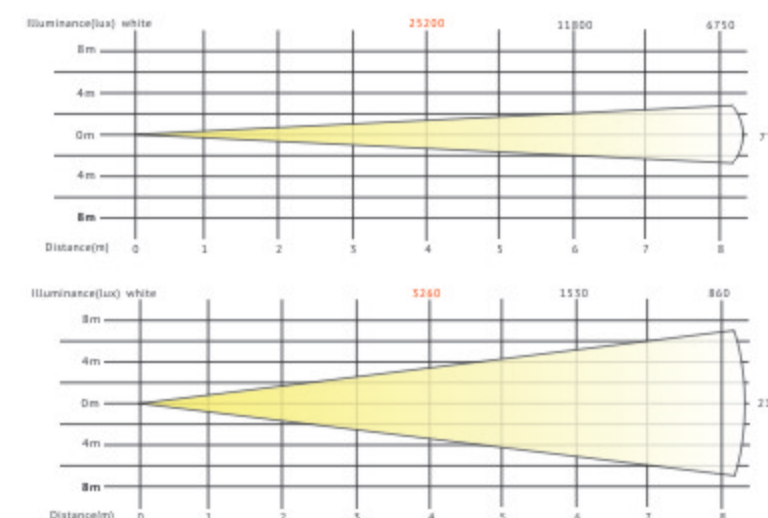

Product details

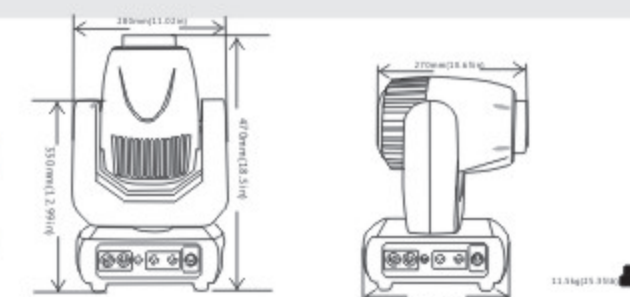

10CH	1	2	3	4	5	6	7	8	9	10
%	Pan	Tilt	Pan/Tilt Speed	Dimmer	Strobe	Color wheel	Static gobo wheel	Focus	Prism	Prism rotation
100%	0°	0°	0°	0°	0°	0°	0°	0°	0°	0°

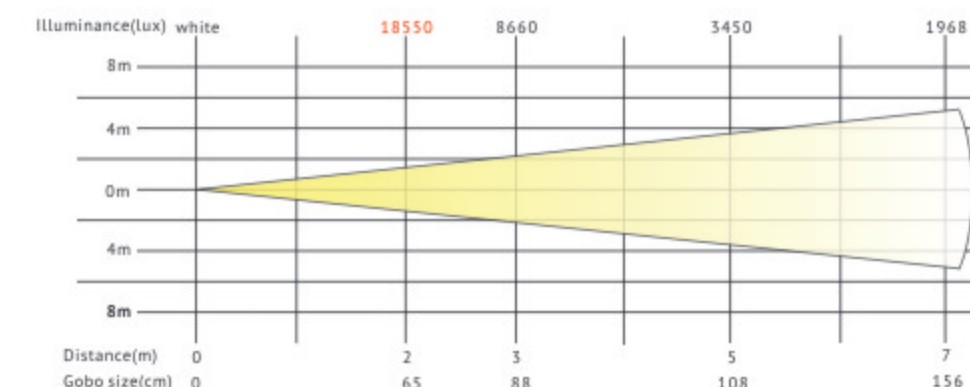

150W LED Moving Head Beam Sharp Light




VG-LMB150A




VG-LMB150A

Specification		
Product model	VG-LMB150A	VG-LMB150B
Light sources	1pcs pure white 150W LED Lamp	1pcs pure white 150W LED Lamp
Input power	AC90-240V, 50/60Hz	AC90-240V, 50/60Hz
Power	250W	150W
Light output	338800 Lux@ 1m2°	657600 Lux@ 1m2°
Life span of LED	50000h	50000h
Zoom angle	2°	2°
Dimmer	0-100% linear dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons	LCD display+4 buttons
DMX channel	13CH	13CH
Working temp.	-25-+45°C	-25-+45°C
Cooling system	High quality mute fans	High quality mute fans
Control mode	DMX512/Master-slave/Auto-run/Sound active	DMX512/Master-slave/Auto-run/Sound active
IP rating	IP 20	IP 20
Accessories	Hanging bridge, power cable, signal cable	Hanging bridge, power cable, signal cable
Net weight	12kg	12kg
Body size	300Dx200Wx490Hmm	295Dx198Wx481Hmm

Product details

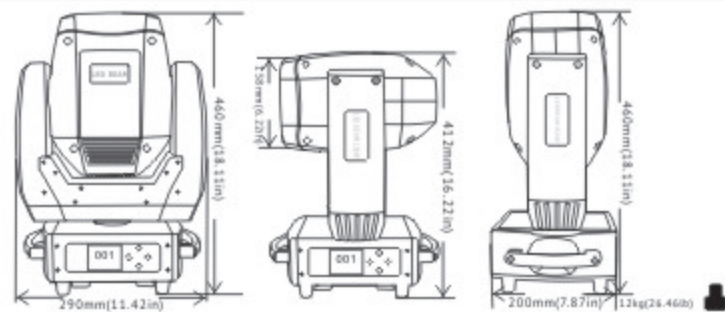

13CH	1	2	3	4	5	6	7	8	9	10	11	12	13
%	Pan	Pan fine	Tilt	Tilt fine	Pan/Tilt Speed	Dimmer	Shutter	Color wheel	Gobo wheel	Prism	Prism rotation	Focus	Macro
100% 0%	↔	↔	↕	↕	↕	0-100%	0-100%	0-100%	0-100%	0-100%	0-100%	0-100%	0-100%
100% 0%	↔	↔	↕	↕	↕	0-100%	0-100%	0-100%	0-100%	0-100%	0-100%	0-100%	0-100%

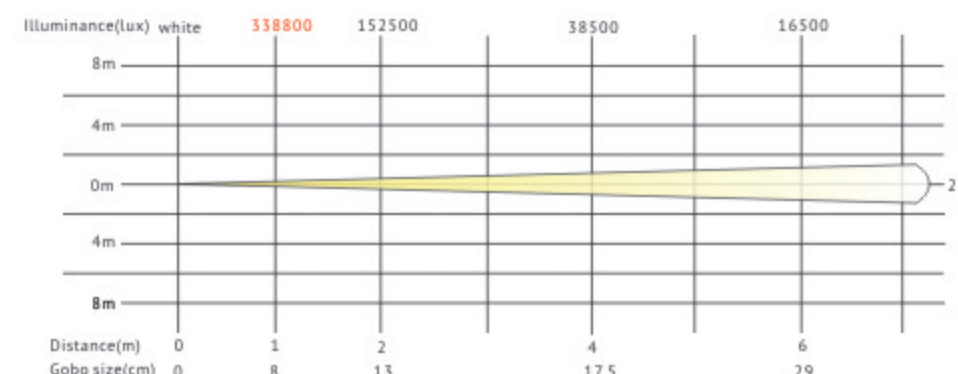


Features

- Equips 150W LED lamp, and added the high precision convex lens to make the light brightness enough, which can replace the 230W 7R easily;
- 2 degree beam angle, make sure the light output is narrow and parallel;
- 8 face or 16 face prism to make the prism effect is wonderful;
- High quality LED chips has been used, the lifespan can reach 50000h, you are not need change the lamp often compare with the moving head light;
- Small size design, the light is not very heavy only 12kgs, which is smart and powerful.

Application




Effect

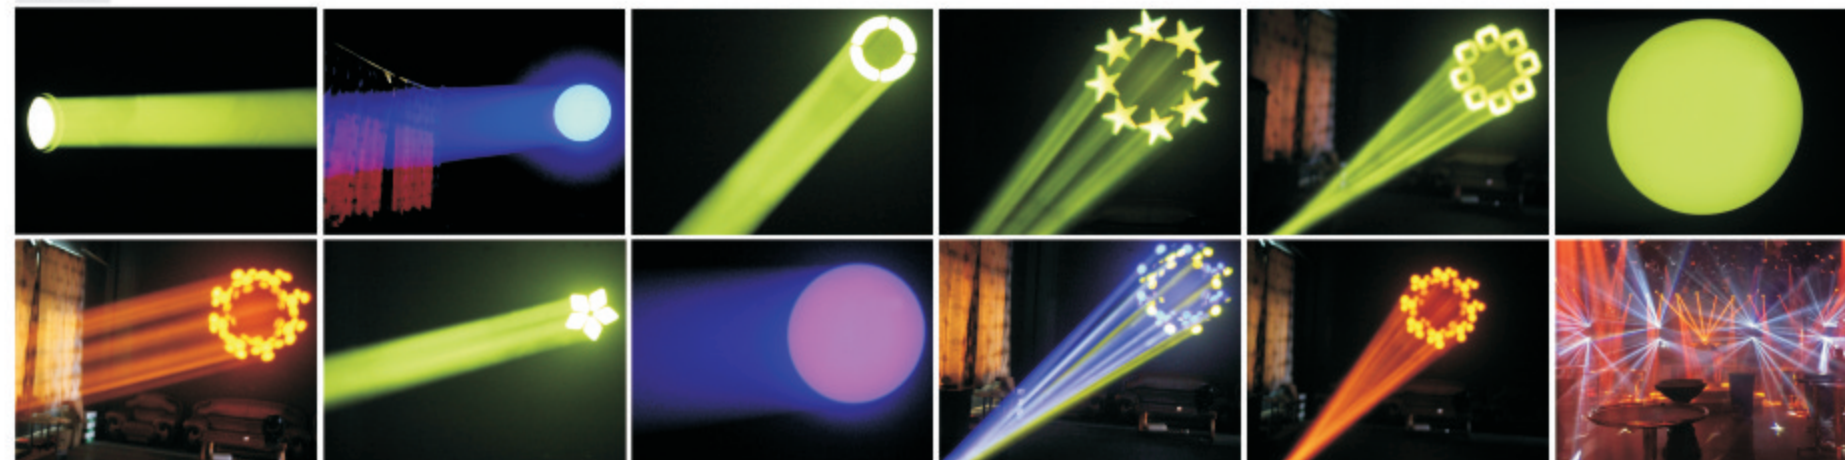

Manufacturing & Package




Specification		
Product model	Swift 1925Z-N	Swift 1925Z
Light sources	19pcs 25W RGBW 4in1 OSRAM brand LED lamps	19pcs 25W RGBW 4in1 OSRAM brand LED lamps
Input power	AC90-240V, 50/60Hz	AC90-240V, 50/60Hz
Power	500W	500W
Light output	108500lux@ 1m15°full, 41089lux@1m60°	108500lux@ 1m15°full, 41089lux@1m60°
Life span of LED	50000h	50000h
Zoom angle	15-60°	15-60°
Dimmer	0-100% linear dimmer	0-100% linear dimmer
Control panel	LCD display+ 4 buttons	LCD display+ 4 buttons
DMX channel	14CH	14CH
Working temp.	-25-+45℃	-25-+45℃
Cooling system	High quality mute fans	High quality mute fans
Control mode	DMX512/Master-slave/Auto-run/Sound active	DMX512/Master-slave/Auto-run/Sound active
IP rating	IP 20	IP 20
Accessories	Hanging bridge, power cable, signal cable	Hanging bridge, power cable, signal cable
Net weight	9.2kg	9.5kg
Dimension	348Dx208Wx381Hmm	325Dx188Wx395Hmm


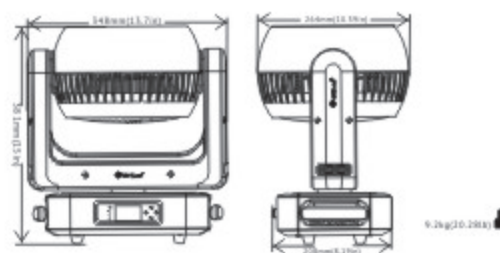


© 2010 Pearson Education, Inc.





14CH	1	2	3	4	5	6	7	8	9	10	11	12	13	14
%	Shutter	Beam Dimmer	Zoom	Pan	Pan fine	Tilt	Tilt fine	Picture Control setting	Color Wheel effect	Red	Green	Blue	White	Beam CCT
100% 255			beam: 15°-60° 											
	random strobe 													
	pulse-effect in sequence 		      											
	strobe close 													

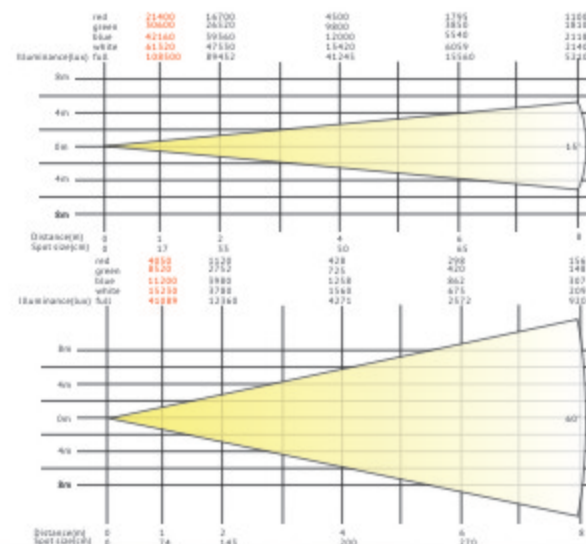


- New design 19pcs 25W LED zoom wash light, which is powerful and brightness;
- 15-60degree zoom effect, from spot to flood can meet different performance scenes;
- Same DMX layout as the Martin Aura 14CH, you can use the same scan library control the light directly, no need edit again;
- Three phase motors for pan and tilt, moving very fast;
- Equips mute fan, and silent belts for moving, suitable for some scenes have the strict noise request.

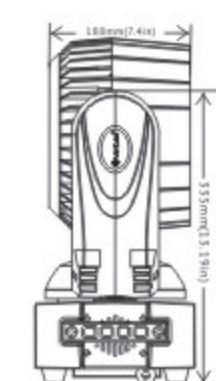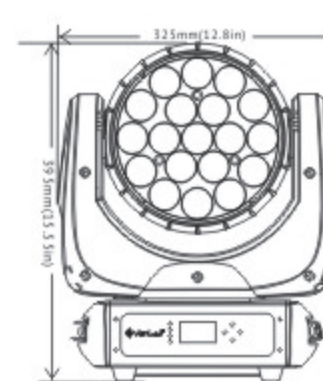

11km(24.25(h)) ■



VanCoo
Stage & Studio Lights

A collage of six photographs showing various types of stage lighting equipment. The top row shows three images: a close-up of a stage light fixture, a row of stage lights emitting a purple glow, and a row of stage lights emitting a white glow. The bottom row shows three images: a row of stage lights emitting a blue glow, a row of stage lights emitting a purple glow, and a row of stage lights emitting a white glow. The equipment includes spotlights and moving heads, arranged on a stage.

VanCoo
Stage & Studio Lights


Product details



VanCura
Stage 6: Study Unit

Technical drawings of the Sika 24.250r spotlight showing front and side views with dimensions:

- Front View:** Shows a circular lens with 18 LEDs arranged in a 3x6 grid. Dimensions include a diameter of 325 mm (12.8 in) and a height of 350 mm (13.8 in).
- Side View:** Shows the profile of the spotlight. Dimensions include a width of 189 mm (7.4 in) and a height of 350 mm (13.8 in).

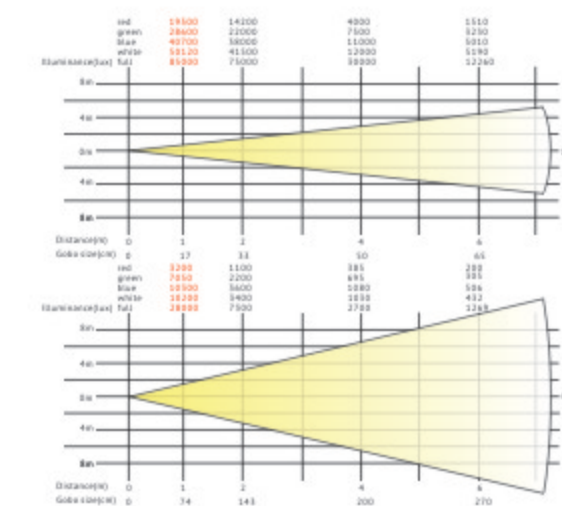

Aura 7pcs 40W LED Moving Head Beam Wash Light



Specification	
Product model	Swift 740
Light sources	7pcs 40W RGBW 4in1 LED lamp
Input power	AC90-240V, 50/60Hz
Power	320W
Beam angle	10-60degree
Control mode	DMX-512; Master/slave; Demo
Control panel	LCD display+4 buttons
DMX channel	14CH
Projection distance	4-30m
Shell material	ABS
Dimmer	0-100% linear dimmer
Strobe	1-25time/s
IP rating	IP 20
Accessories	Hanging bridge, power cable, signal cable
Net weight	9.2kg
Body size	325*188*395mm

4 Heads 32W LED DJ Moving Head Beam Spot Light





Specification	
Product model	VG-4HS432D
Light sources	4pcs 32W RGBW 4in1 brightness LED lamps
Input power	AC90-240V, 50/60Hz
Power	150W
Beam angle	8degree
Control mode	DMX-512; Master/slave; Demo; Sound active
Control panel	LCD display+4 buttons
DMX channel	6CH/10CH/19CH/32CH/56CH
Projection distance	4-30m
Pan/tilt	540/270degree
Dimmer	0-100% linear dimmer
Strobe	1-25time/s
IP rating	IP 20
Accessories	Power cable, signal cable
Net weight	11kg
Body size	1050*90*260mm

Product details



As same as Martin Aura channel layout, can call the scan library to control directly


14CH	1	2	3	4	5	6	7	8	9	10	11	12	13	14
%	Shutter	Beam Dimmer	Zoom	Pan	Pan fine	Tilt	Tilt fine	Pattern Control setting	Color wheel effect	Red	Green	Blue	White	Beam CCT
100% 250	random strobe	beam: 15°-60°	beam: 15°-60°	beam: 15°-60°	beam: 15°-60°	beam: 15°-60°	beam: 15°-60°	beam: 15°-60°	beam: 15°-60°	beam: 15°-60°	beam: 15°-60°	beam: 15°-60°	beam: 15°-60°	beam: 15°-60°
100% 250	random strobe	beam: 15°-60°	beam: 15°-60°	beam: 15°-60°	beam: 15°-60°	beam: 15°-60°	beam: 15°-60°	beam: 15°-60°	beam: 15°-60°	beam: 15°-60°	beam: 15°-60°	beam: 15°-60°	beam: 15°-60°	beam: 15°-60°
100% 250	random strobe	beam: 15°-60°	beam: 15°-60°	beam: 15°-60°	beam: 15°-60°	beam: 15°-60°	beam: 15°-60°	beam: 15°-60°	beam: 15°-60°	beam: 15°-60°	beam: 15°-60°	beam: 15°-60°	beam: 15°-60°	beam: 15°-60°

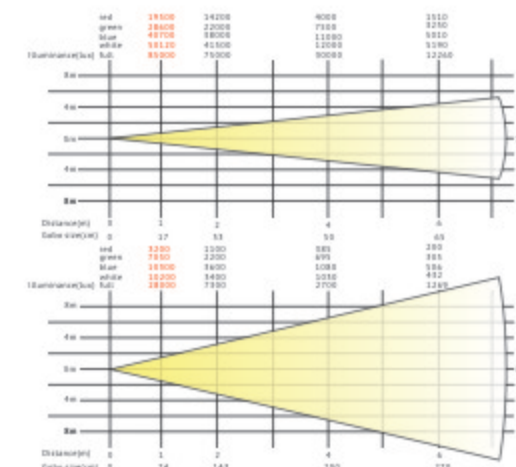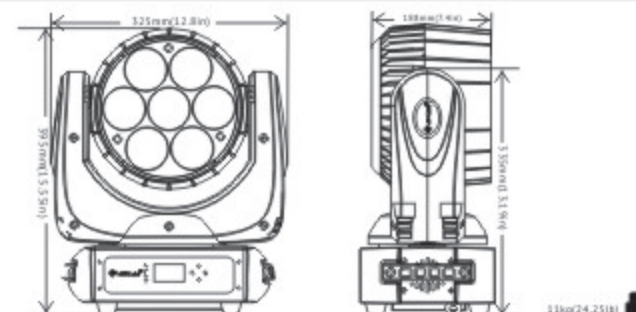

Pr Product details



10CH	1	2	3	4	5	6	7	8	9	10
%	Pan	Tilt	Dimmer	Strobe	Function	Speed	Color	Color chasing	Pan fine	Tilt fine
100% 250	beam: 15°-60°	beam: 15°-60°	beam: 15°-60°	beam: 15°-60°	beam: 15°-60°	beam: 15°-60°	beam: 15°-60°	beam: 15°-60°	beam: 15°-60°	beam: 15°-60°
100% 250	beam: 15°-60°	beam: 15°-60°	beam: 15°-60°	beam: 15°-60°	beam: 15°-60°	beam: 15°-60°	beam: 15°-60°	beam: 15°-60°	beam: 15°-60°	beam: 15°-60°
100% 250	beam: 15°-60°	beam: 15°-60°	beam: 15°-60°	beam: 15°-60°	beam: 15°-60°	beam: 15°-60°	beam: 15°-60°	beam: 15°-60°	beam: 15°-60°	beam: 15°-60°

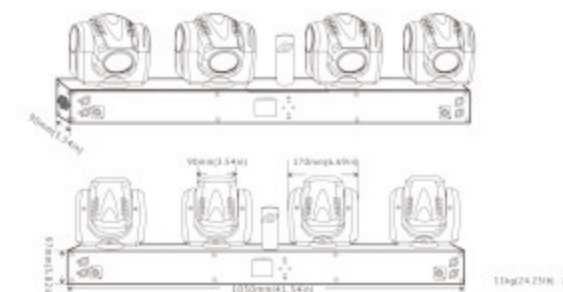

380W 3in1 Spot Beam Wash Moving Head Light




Specification	
Product model	VG-MH380
Light sources	brand 380W Lamp
Input power	AC90-240V, 50/60Hz
Power	580W
Beam angle	2.5°
Zoom angle	2.5°-65°
Static gobo wheel	11 fixed gobos+ white and effect gobo
Rotating gobo wheel	7 gobos+ white
Color wheel	13 color + white
Prism	25 and 16 facets circular rotating prism
Frost	100% frost
DMX channels	12CH, 24CH
Control mode	DMX512/Master-slave/Auto-run/Sound active
IP rating	IP 20
Accessories	Hanging bridge, power cable, signal cable
Net weight	22kg
Dimension	410Dx310Wx625Hmm

Product details



22kg(48.5lb)



Effect Gobo Wheel



Static Gobo Wheel



Rotation Gobo Wheel



24CH	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	
%	Pan	Pan fine	Tilt	Tilt fine	Pan/Tilt Speed	Macro	Color wheel	Half color	Effect gobo	Static gobo	Rotation gobo	Rotation gobo adjustment	Rotation gobo fine	Prism	Prism rotation	Frost	Zoom	Zoom fine	Focus	Focus fine	Auto focus	Blank	Strobe	Dimmer	
					normal blanked by advance blanked by moving												beam: 2.5°-40°								


Features

- 2.5-65degree zoom range, can realize spot beam wash different scenes request;
- 1pcs static gobo wheel with 11 fixed gobos, 1pcs rotation gobo wheel with 7 rotation gobos and 1pcs effect gobo wheel to make sure different gobo effect optional during using;
- 25 and 16 facets circular rotating prism make the prism effect is very wonderful;
- With 100% frost functions;

Application



Effect

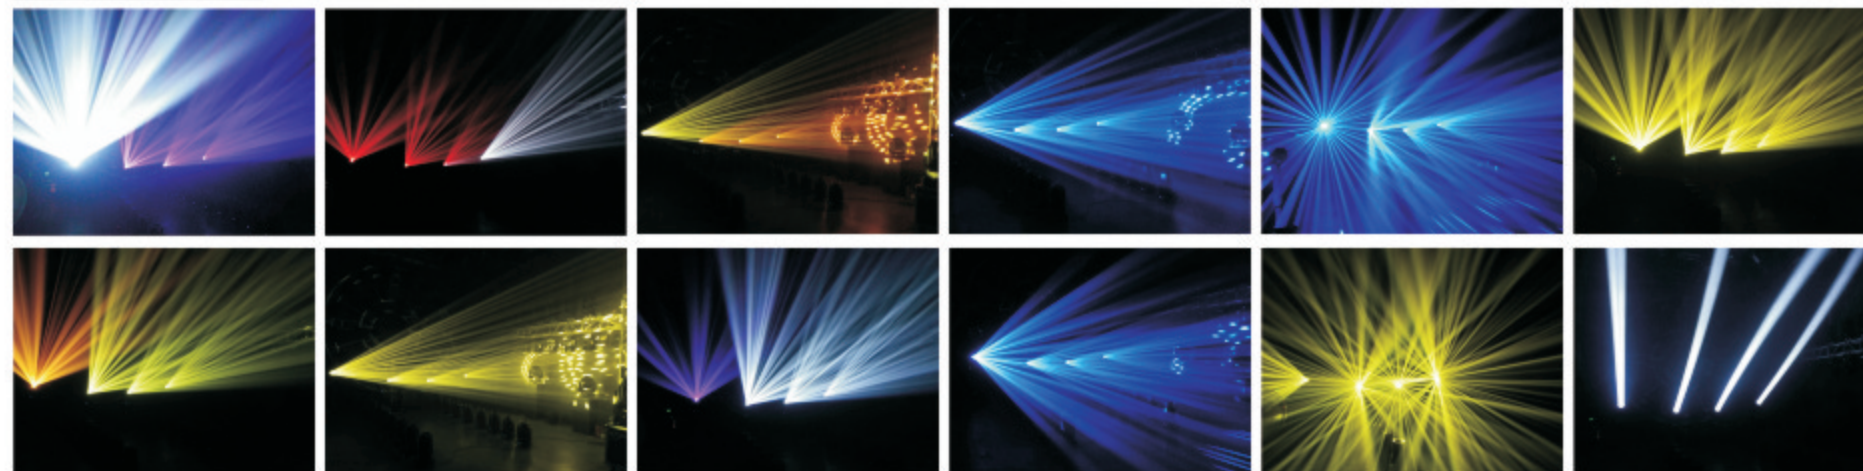

Manufacturing & Package




350W 17R 3in1 Spot Beam Wash Moving Head Light



Specification	
Product model	VG-MH350B
Light sources	brand 17R 350W Lamp
Input power	AC90-240V, 50/60Hz
Power	550W
Beam angle	2.5°
Zoom angle	2.5°-65°
Static gobo wheel	11 fixed gobos+ white and effect gobo
Rotating gobo wheel	7 gobos+ white
Color wheel	13 color + white
Prism	25 and 16 facets circular rotating prism
Frost	100% frost
DMX channels	12CH, 24CH
Control mode	DMX512/Master-slave/Auto-run/Sound active
IP rating	IP 20
Accessories	Hanging bridge, power cable, signal cable
Net weight	22kg
Dimension	410Dx310Wx625Hmm

Product details

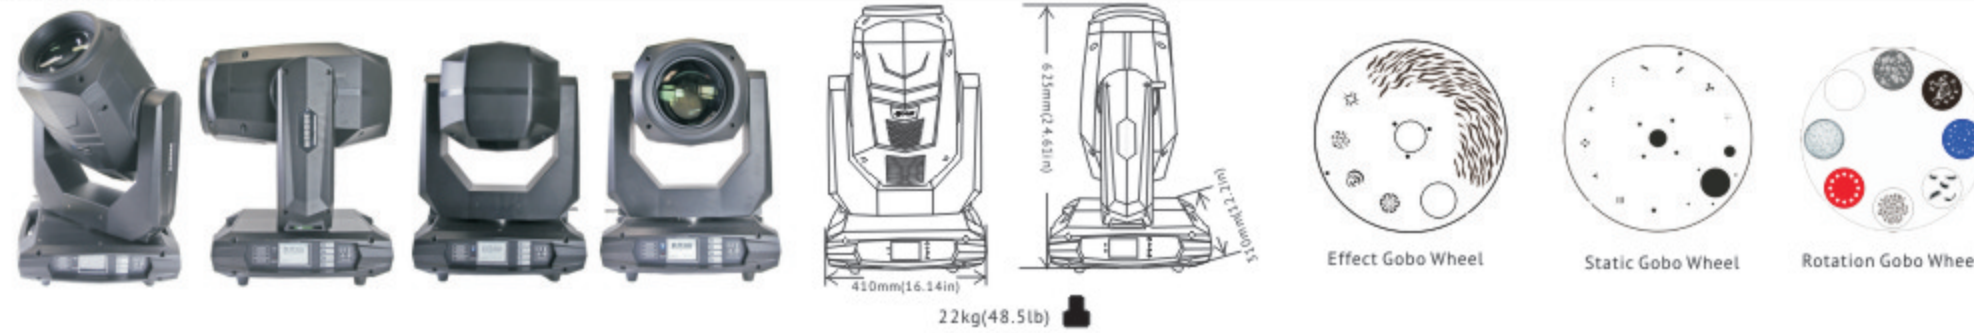

24CH	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
%	Pan	Pan fine	Tilt	Tilt fine	Pan/Tilt Speed	Macro	Color wheel	Half color	Effect gobo	Static gobo	Rotation gobo	Rotation gobo fine	Prism	Prism rotation	Frost	Zoom	Zoom fine	Focus	Focus fine	Auto focus	Blank	Strobe	Dimmer	
100% 200	100	100	100	100	normal blanket by effects blanket by moving	Macro	13 colors + white	13 colors + white	11 fixed gobos + white and effect gobo	11 fixed gobos + white and effect gobo	7 gobos + white	7 gobos + white	25 and 16 facets circular rotating prism	25 and 16 facets circular rotating prism	100% frost	beam: 2.5°-65°	2.5°-65°	2.5°-65°	2.5°-65°	auto		random strobe	random strobe	Dimmer



350W 17R 3in1 Moving Head Spot Beam Light





Specification	
Product model	VG-MH350A
Light sources	350W 17R lamp
Input power	AC90-240V, 50/60Hz
Power	550W
Life span of lamp	2000h
Color wheel	13 colors + white
Gobo wheel	12 rotation gobos, 17 fixed gobos, with gobo rotation function
Control panel	LCD display + 4 buttons
DMX channel	16CH/24CH
Prism	1pc 12-prism
Dimmer	0-100% linear dimmer
Strobe	1-25time/s
Zoom angle	2.5-42degree
Accessories	Hanging bridge, power cable, signal cable
Net weight	21kg
Body size	380*240*590mm

Product details



24CH	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
%	Pan	Pan fine	Tilt	Tilt fine	Pan/Tilt Speed	Macro	Color wheel	Half color	Gobo 2 speed	Gobo wheel 1	Gobo wheel 2	Rotating gobo	Rotating gobo fine	Prism	Prism rotation	Frost	Zoom	Zoom fine	Focus	Focus fine	Auto focus	Strobe	Dimmer	Blank
100% 200	100	100	100	100	normal blanket by effects blanket by moving	Macro	13 colors + white	13 colors + white	2 speeds	12 rotation gobos, 17 fixed gobos	12 rotation gobos, 17 fixed gobos	12 rotation gobos, 17 fixed gobos	12 rotation gobos, 17 fixed gobos	12-prism	12-prism	100% frost	beam: 2.5°-42°	2.5°-42°	2.5°-42°	2.5°-42°	auto	random strobe	random strobe	Blank



Supper Beam Moving Head Light



Specification

Product model	VG-SB330	VG-SB260
Light sources	YODN 330 16R	YODN 260
Input power	AC110-240V, 50/60Hz	AC110-240V, 50/60Hz
Power	330W	260W
Pan	540degree(16bit)	540degree(16bit)
Tilt	270degree(16bit)	270degree(16bit)
Control panel	LCD display+4 buttons	LCD display+4 buttons
DMX channel	18CH	18CH
Projection distance	5-100m	5-100m
Color wheel	13 colors + white	13 colors + white
Gobo wheel	13 gobos + white	13 gobos + white
Strobe	1-13time/s	1-13time/s
IP rating	IP 20	IP 20
Accessories	Power cable, signal cable	Power cable, signal cable
Net weight	18kg	18kg
Body size	330*230*590mm	330*230*590mm

Product details

280W 10R 3in1 Moving Head Spot Beam Wash Light



Specification

Product model	VG-MH280A
Light sources	280W 10R Lamp
Input power	AC110-240V, 50/60Hz
Power	400W
Beam angle	8.7degree~23degree
Static Gobo wheel	with 14 fixed gobos, at variable rotation
Rotating Gobo wheel	9 bidirectional and indexable gobos
Color wheel	13 dichroic filters + white
Atomizing angle	60degree
Focus	linear adjustment
DMX channel	17CH, 24CH
Strobe	1-13time/s
IP rating	IP 20
Accessories	Power cable, signal cable
Net weight	18.5kg
Body size	D380*W240*H900mm

440W Outdoor Moving Head Spot Beam Light




Specification

Product model	VG-WMH440
Light sources	brand 440W Lamp
Input power	AC90-240V, 50/60Hz
Power	470W
Life span of lamp	2000h
Color wheel	14 colors + white
Gobo wheel	14 fixed gobos, with gobo rotation function
Prism	1pc 8 face prism(3 prism/16 prism optional)
Atomization	with atomization function, can achieve soft light effect
DMX channel	14CH, 18CH
Dimmer	0-100% linear dimmer
Strobe	1-25time/s
Beam angle	2degree
Accessories	Hanging bridge, power cable, signal cable
Net weight	32.5kg
Body size	D430*W400*H780mm

Product details

17R 350W Outdoor Moving Head Spot Beam Light

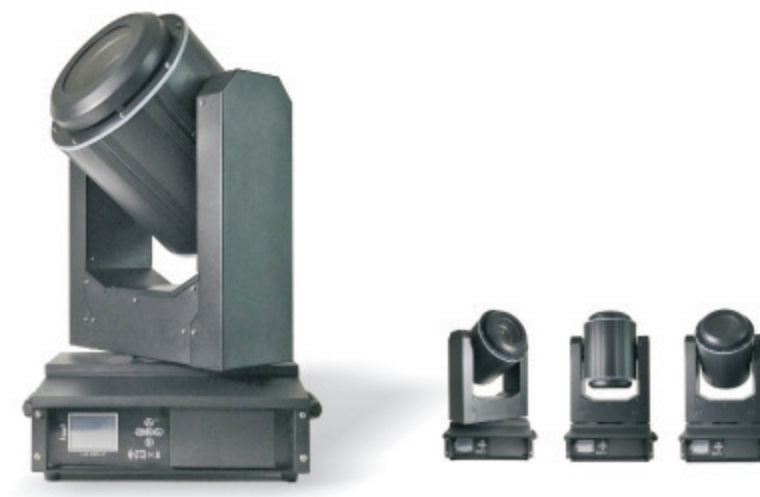

Specification


Product model	VG-WMH350
Light sources	350W 17R lamp
Input power	AC90-240V, 50/60Hz
Power	400W
Life span of lamp	2000h
Color wheel	14 colors + white
Gobo wheel	17 fixed gobos, with gobo rotation function
Control panel	LCD display + 4 buttons
DMX channel	16CH/20CH
Prism	1pc 8 faces-prism
Dimmer	0-100% linear dimmer
Strobe	1-25time/s
Beam angle	0-2.3degree
Accessories	Hanging bridge, power cable, signal cable
IP rating	Ip55
Net weight	28kg
Body size	456*406*866mm

Quick Locker Style 200W LED Audience Blinder Light



Specification		
Product model	VG-AB2-QL	VG-AB2-B-QL
Light sources	2pcs 100W/200W COB LED Lamps	2pcs bi-color 200W COB LED Lamps
Input power	AC90-240V, 50/60Hz	AC90-240V, 50/60Hz
Power	220W/350W	220W/350W
Beam angle	45°	45°
CRI	Ra>80/93/95/97 optional	Ra>80/93/95/97 optional
Color temperature	warm white 3200K/ cold white 5600K	from 3200K-5600K
Dimmer	0-100% linear dimmer	0-100% linear dimmer
Dimmer curve	4 curve speed adjustable	4 curve speed adjustable
Strobe	1-25 times/second, speed adjustable	1-25 times/second, speed adjustable
Projection distance	3-15m	3-15m
DMX channels	2CH, 3CH	3CH, 4CH
Control mode	DMX512/Master-slave/Auto-run	DMX512/Master-slave/Auto-run
IP rating	IP 20	IP 20
Accessories	quick locker, power cable, signal cable	quick locker, power cable, signal cable
Net weight	5.5kg	5.5kg
Dimension	400Dx177Wx200Hmm	400Dx177Wx200Hmm

Product details

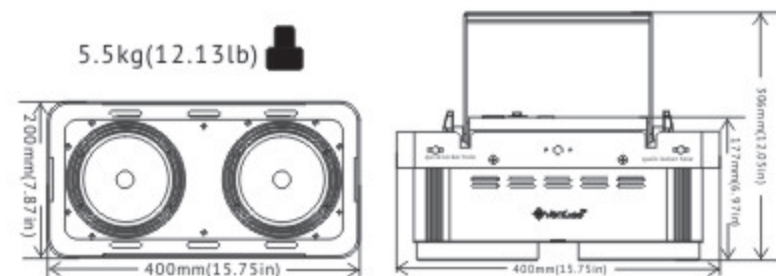

2CH Mode

2CH	1	2
%	Lamp 1 Dimmer	Lamp 2 Dimmer

3CH Mode

3CH	1	2	3
%	Lamp 1 Dimmer	Lamp 2 Dimmer	Strobe
			 random strobe pulse-effect sequence strobe dim



Different Connection Methods, Do What Shape You Want!!!



Features

- One light has 8 quick lockers, which can make sure four sides can connect the lights as you need;
- The quick locker is very easy to lock by hand, can operate even without any tools;
- Different CRI Ra80, Ra95, Ra97 LED chips are optional, not only can be the audience blinder light, but also can be the main face light for your stage;
- With 4 speed dimmer curve optional, can realize the effect as the traditional audience blinders
- Small size, elegant appearance, special design for markets.

Application



Effect



Manufacturing & Package




400W LED Audience Blinder Light



Matrix Blinder Light Series

Specification	
Product model	VG-COB4-0
Light sources	4pcs 100W COB LED lamp (warm white/cool white/bi-color)
Input power	AC100-240V, 50/60Hz
Power	450W
Quantity of LED	4pcs 100W COB warm white LED lamps
Life span of LED	50000h
Beam angle	45degree
Dimmer	0-100% linear dimmer
Control panel	digital tube display+4 buttons
DMX channel	1/2/4/8CH
Working temp.	-25-+45℃
Cooling system	High quality radiator, fan without noise
Control mode	DMX512/Demo/Manual
IP rating	IP 65
Accessories	Handle, power cable, signal cable
Net weight	10.5kg
Body size	370*370*100mm


Product details

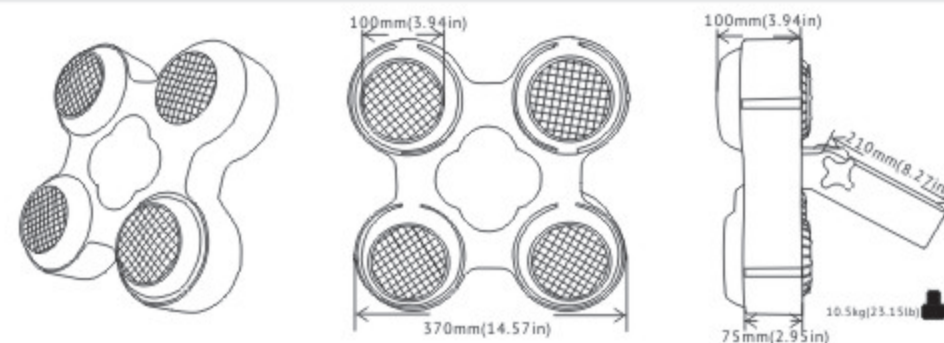

8CH	1	2	3	4	5	6	7	8
%	Dimmer	Lamp 1 Dimmer	Lamp 2 Dimmer	Lamp 3 Dimmer	Lamp 4 Dimmer	Strobe	Function Choose	Function Speed
100%						random strobe	Sound active	Speed
						random strobe	Flash	
						random strobe	Jump	
						strobe close		



400W LED Audience Blinder Light

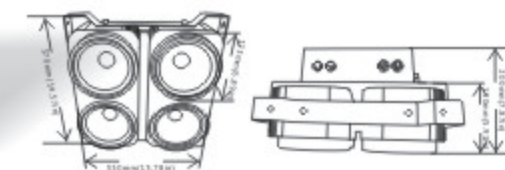

Matrix Blinder Light Series

Specification	
Product model	VG-AB4, VG-AB4-B
Light sources	4pcs 100W 3200K/5600K COB LED lamp, or bicolor COB LED
Input power	AC100-240V, 50/60Hz
Power	450W
Quantity of LED	4pcs 100W COB warm/cold white LED lamps
Life span of LED	50000h
Beam angle	45degree
Dimmer	0-100% linear dimmer
Control panel	digital tube display+4 buttons
DMX channel	1/2/4/8CH; 12CH(bicolor one)
Working temp.	-25-+45℃
Cooling system	High quality radiator, fan without noise
Control mode	DMX512/Demo/Manual
IP rating	IP 20
Accessories	Handle, power cable, signal cable
Net weight	10.5kg
Body size	350*370*200mm

200W LED Audience Blinder Light




Specification	
Product model	VG-AB2
Light sources	100W COB LED lamp
Input power	AC100-240V, 50/60Hz
Power	250W
Quantity of LED	2pcs 100W COB warm white LED lamps
Life span of LED	50000h
Beam angle	45degree
Dimmer	0-100% linear dimmer
Control panel	digital tube display+4 buttons
DMX channel	6CH
Working temp.	-25-+45℃
Cooling system	High quality radiator, fan without noise
Control mode	DMX512/Demo/Manual
IP rating	IP 20
Accessories	Handle, power cable, signal cable
Net weight	5.5kg
Body size	380*150*180mm

600W Long Lens LED Follow Spot Light




Specification	
Product model	VG-LFL600
Light sources	high brightness 600W LED lamp
Input power	AC90-240V, 50/60Hz
Power	680W
Beam angle	7°-13°
Color	seven color + white changeable, by color wheel
Color temperature	7500-8000K
CTO Wheel	3200K+4500K+5600K
Dimmer	0-100% linear dimmer
Projection distance	100-150m
Control mode	DMX-512; Manual
DMX channels	5CH
Strobe	1-20 times/second
IP rating	IP 20
Accessories	Tripods, power cable, signal cable, flight case package
Net weight	17.5kg
Dimension	775*263*213mm

Product details

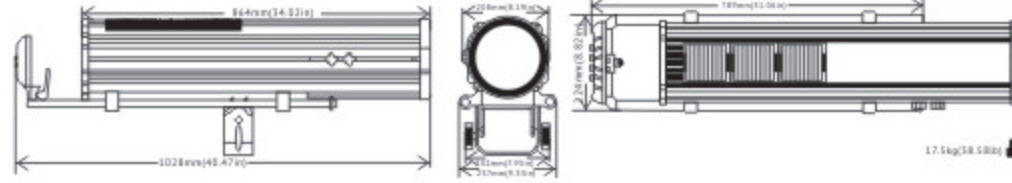

5CH	1	2	3	4	5
%	Dimmer	Strobe	Iris	Color wheel	CTO wheel
100% 255	0 255	0 255	0 255	0 255	0 255
0 255	0 255	0 255	0 255	0 255	0 255

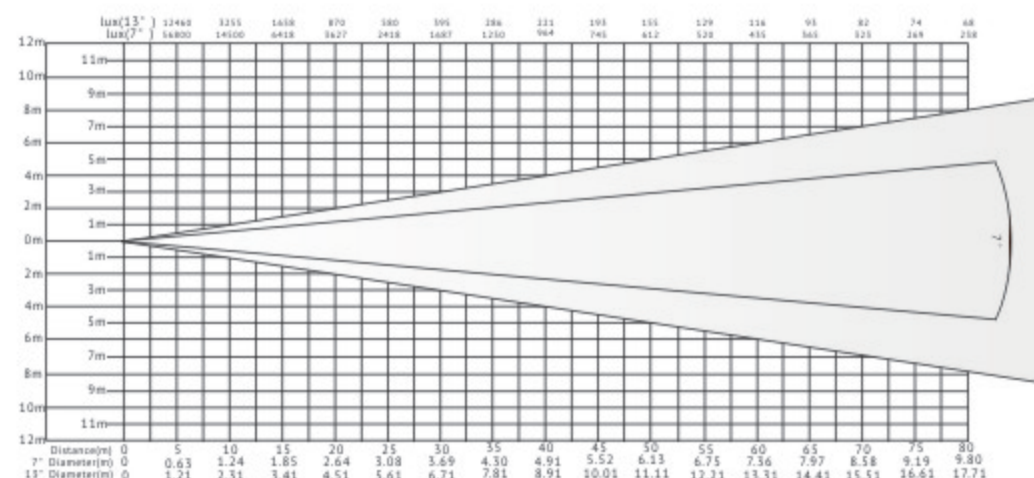

Features

- Equips high brightness 600W LED chip, which is very powerful, the brightness is more better than the 3000W lamp;
- Equips special lens group as the main optic, to realize the light output is brightness and can reach long distance;
- With the color wheel 7 colors+ white;
- With the color temperature wheel 3200K+4500K+5600K;
- Elegant appearance, easy operate, come with strong tripods and flight case package.

Application



Effect



Zoom Changeable 350W LED Follow Spot Light




Specification	
Product model	VG-LFL350C
Light sources	350W High brightness LED lamp more brightness than 1500w discharge lamp
Input power	AC100-240V, 50/60Hz
Color temperature	8000-8500K
Lifespan	more than 50000h
Luminous flux	20000-24000lux
Color wheel	5 colors + open white
CTO wheel	3200K, 4500K, 5600K
Iris	electric iris
Beam angle	7-13degree
Focus	Manual focus
Strobe	1-20 flash/s
IP rating	IP 20
Accessories	Power cable, user manual
Net weight	11.5kg
Body size	775*263*213mm

Iris Function 350W LED Follow Spot Light




Specification	
Product model	VG-LFL350
Light sources	350W High brightness LED lamp more brightness than 1500w discharge lamp
Input power	AC100-240V, 50/60Hz
Color temperature	8000-8500K
Lifespan	more than 50000h
Luminous flux	20000-24000lux
Color wheel	5 colors + open white
CTO wheel	3200K, 4500K, 5600K
Iris	electric iris
Beam angle	10degree
Focus	Manual focus
Strobe	1-20 flash/s
IP rating	IP 20
Accessories	Power cable, user manual
Net weight	9.9kg
Body size	602*295*272mm



Product details

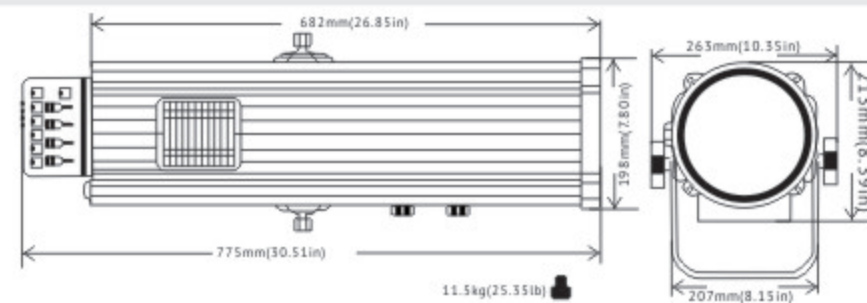

5CH	1	2	3	4	5
%	Color wheel	CTO	Iris	Dimmer	Strobe
100% 100%					
0% 0%					

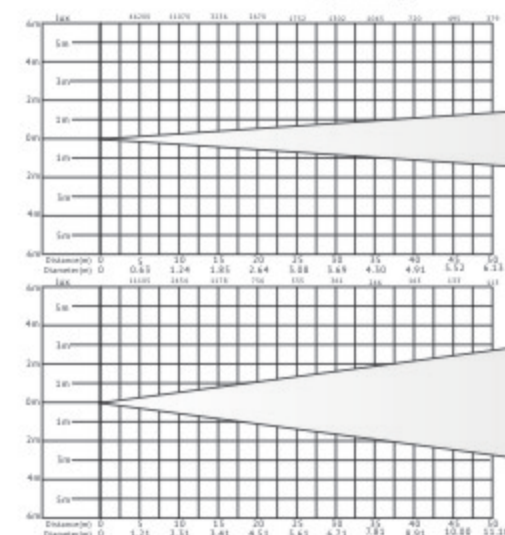

Product details

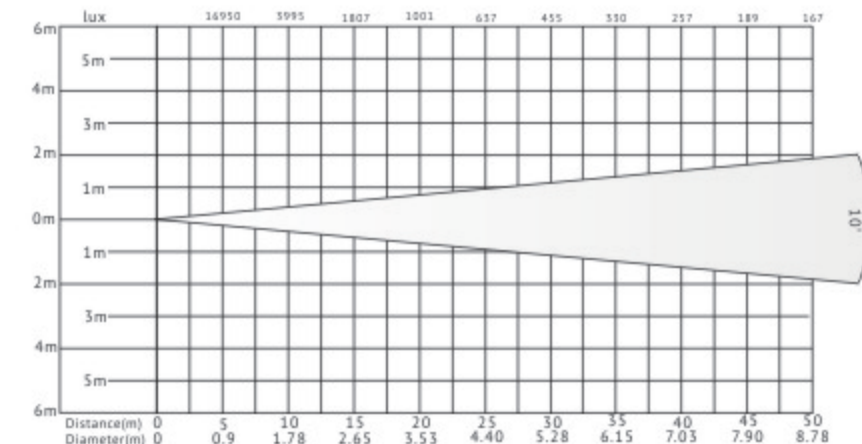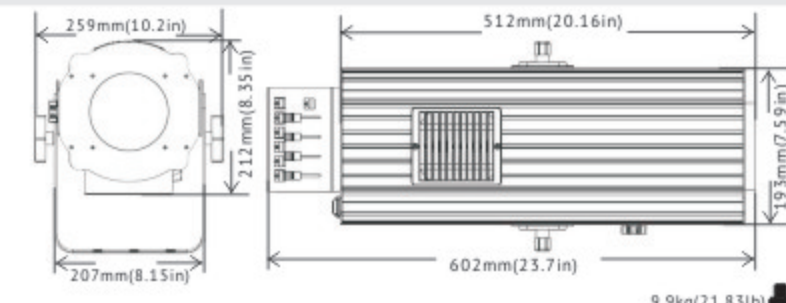

18pcs 18W 6in1 LED Wall Wash Light



LED Wall Wash Light Series



Specification	(every lamp every color control solely)	
Product model	VG-LC1818H	VG-LC1818H-S
Light sources	18pcs 18W RGBWAUV 6in1 LED lamps	18pcs 18W RGBWAUV 6in1 LED lamps
Input power	AC90-240V, 50/60Hz	AC90-240V, 50/60Hz
Power	350W	350W
Beam angle	25°(15° optional)	25°(15° optional)
Color	RGBWAUV 6in1 color mixing	RGBWAUV 6in1 color mixing
Lifespan	50000h	50000h
Dimmer	0-100% linear dimmer	0-100% linear dimmer
Projection distance	3-10m	3-10m
Control mode	DMX-512; Auto run	DMX-512; Auto run
DMX channels	6CH, 10CH, 108CH, 112CH	6CH, 10CH
Strobe	1-20 times/second	1-20 times/second
IP rating	IP 65	IP 65
Housing materials	Aluminum die casting	Aluminum die casting
Accessories	Waterproof Power cable, signal cable	Waterproof Power cable, signal cable
Net weight	8kg	8kg
Dimension	1000*92*171mm	1000*92*171mm


Features

- High Power 18pcs 18W 6in1 LED lamps, which can mix different true colors for different scenes;
- Every color of every led can be controlled solely, or the simple version only control the color together;
- Different built in programs, with water running effect, fade, jump, gradual change and other wonderful effects;
- Ip65 can suitable for outdoor rainstorm using;
- With rebreather can make sure the light is always drying inside.

Application




Effect

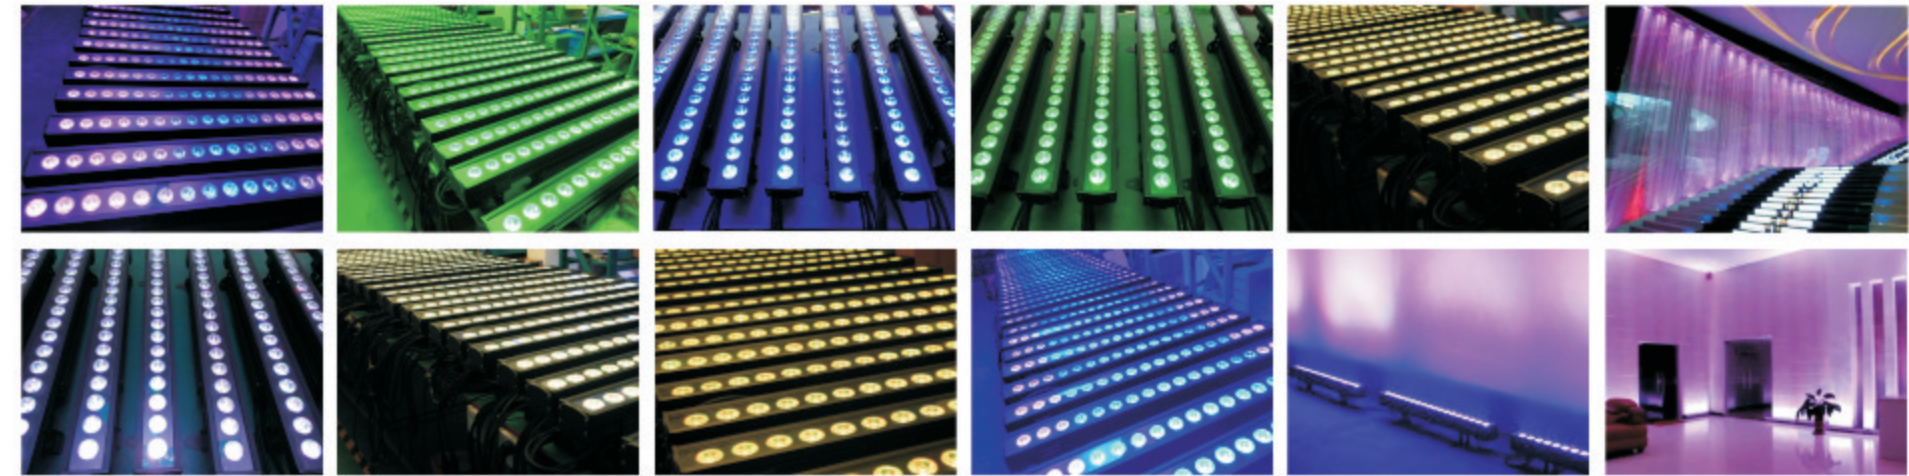

Manufacturing & Package



Product details

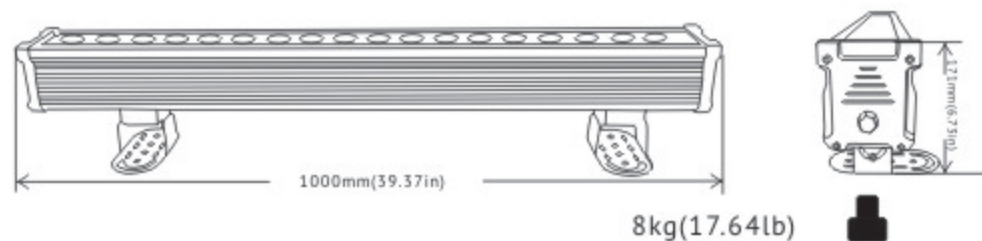

10CH	1	2	3	4	5	6	7	8	9	10
%	Dimmer	Red	Green	Blue	White	Purple	Yellow	Strobe	Function	Function speed
100% 255										
0% 0										



18pcs RGBW 4in1 Outdoor LED Wall Wash Light




Specification (every lamp every color control solely)		
Product model	VG-LC1810D	VG-LC1810D-S
Light sources	18pcs 12W RGBW 4in1 LED lamps	18pcs 12W RGBW 4in1 LED lamps
Input power	AC90~240V, 50/60Hz	AC90~240V, 50/60Hz
Power	200W	200W
Beam angle	15°	15°
Color	RGBW 4in1 color mixing	RGBW 4in1 color mixing
Lifespan	50000h	50000h
Dimmer	0-100% linear dimmer	0-100% linear dimmer
Projection distance	3-10m	3-10m
Control mode	DMX-512; Auto run	DMX-512; Auto run
DMX channels	32CH	8CH, 4CH
Strobe	1-20 times/second	1-20 times/second
IP rating	IP 65	IP 65
Housing materials	Aluminum die casting	Aluminum die casting
Accessories	Waterproof Power cable, signal cable	Waterproof Power cable, signal cable
Net weight	7.6kg	7.6kg
Dimension	1000*92*171mm	1000*92*171mm

24pcs RGB 3in1 LED Wall Wash Light




Specification	
Product model	VG-LC243C
Light sources	24pcs RGB 3in1 LED lamps
Input power	AC90~240V, 50/60Hz
Power	100W
Beam angle	25°
Color	RGB 3in1 color mixing
Lifespan	50000h
Dimmer	0-100% linear dimmer
Projection distance	3-10m
Control mode	DMX-512; Auto run
DMX channels	8CH, 4CH
Strobe	1-20 times/second
IP rating	IP 65
Housing materials	Aluminum die casting
Accessories	Waterproof Power cable, signal cable
Net weight	4.5kg
Dimension	1020*80*120mm


Product details

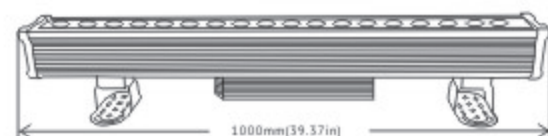


Product details

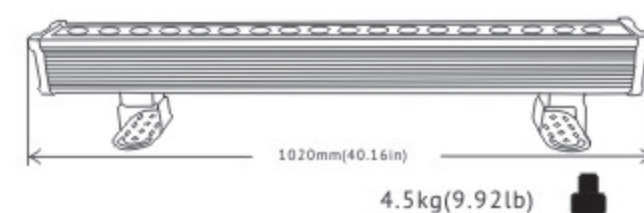

8CH	1	2	3	4	5	6	7	8
%	Dimmer	Red	Green	Blue	White	Strobe	Function	Function speed
100% 255								
0 0								

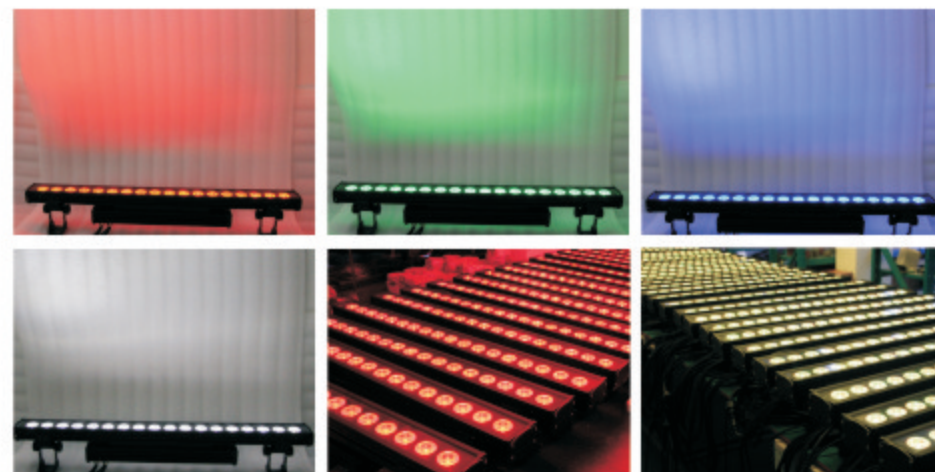

8CH	1	2	3	4	5	6	7	8
%	Dimmer	Strobe	Function	Function speed	Red	Green	Blue	White
100% 255								
0 0								

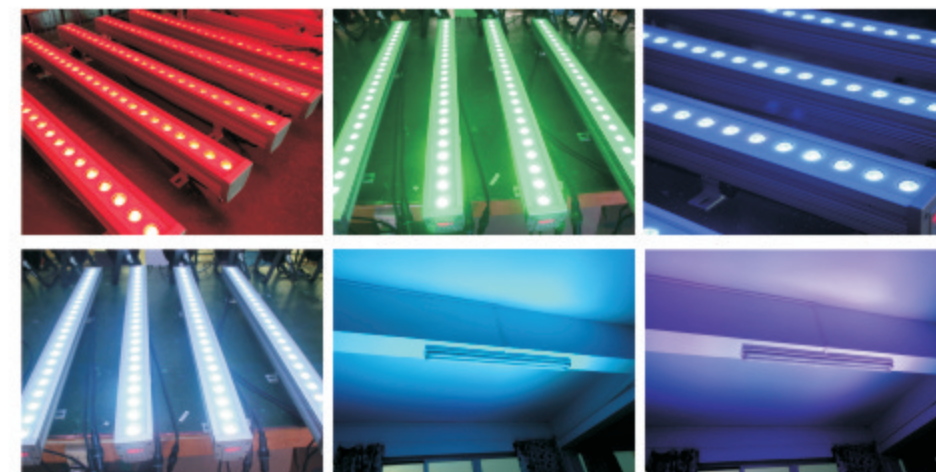

Max 1500W Outdoor LED Strobe Light



LED Strobe Light Series

Specification	
Product model	VG-LST3000
Light sources	1320pcs RGBW 4in1 SMD LEDs
Input power	AC90-240V, 50/60Hz
Power	1500W max
Color	RGBW 4in1 color mixing, colorful
Dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons
DMX channel	4CH; 5CH; 7CH; 13CH; 15CH
Beam angle	120degree
Cooling system	Aluminum radiator, and mute Fan within 58db
Control mode	DMX512/Demo/Manual
IP rating	IP 65
Accessories	Power cable, signal cable
Net weight	12.5kg
Body size	D560*W230*H320mm
Body material	Aluminium die casting





1000W High Power LED Strobe Light



LED Strobe Light Series



Specification	
Product model	VG-LST1000
Light sources	64pcs Red SMD LEDs+64pcs Green SMD LEDs+64pcs Blue SMD LEDs+96pcs White SMD LEDs
Input power	AC90-240V, 50/60Hz
Power	1000W
Beam angle	120°
Color	RGBW color mixing
Lifespan	50000h
Dimmer	0-100% linear dimmer
Projection distance	3-15m
Control mode	DMX-512; Auto run
DMX channels	4CH, 10CH, 14CH, 17CH, 29CH
Strobe	1-25 times/second
IP rating	IP 20
Housing materials	Aluminum die casting
Accessories	Waterproof Power cable, signal cable
Net weight	9kg
Dimension	485*152*300mm

Product details

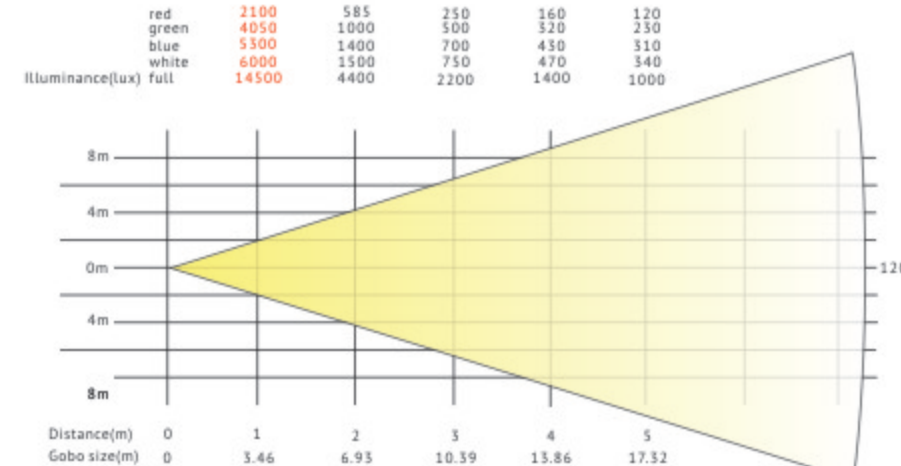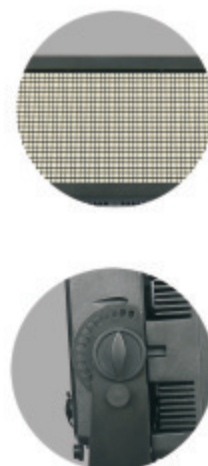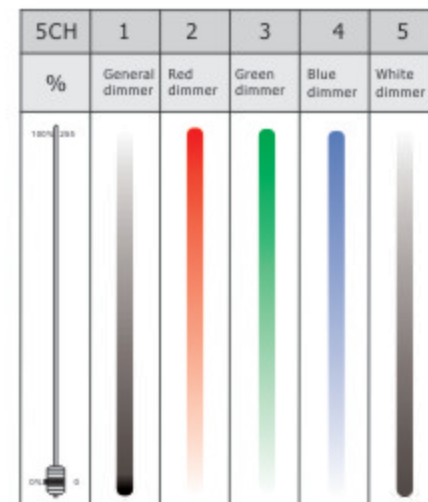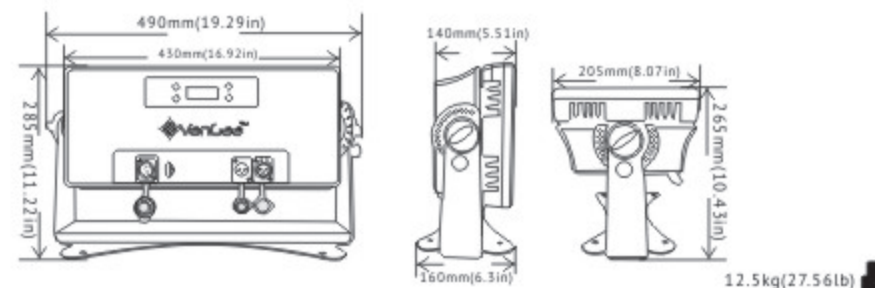

this light has 4CH, 5CH, 7CH, 13H, 15CH optional

Product details

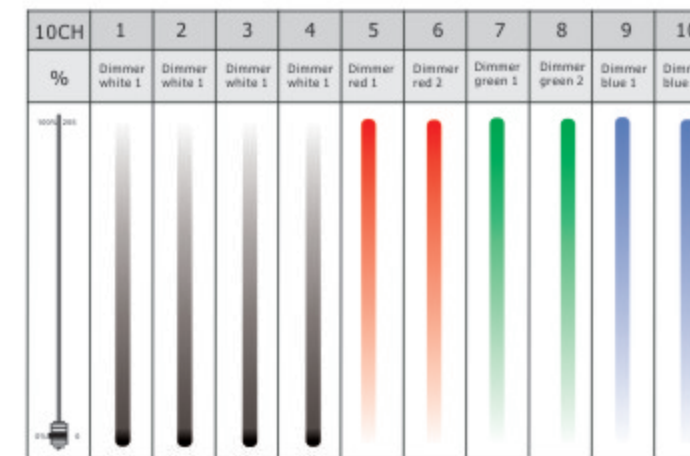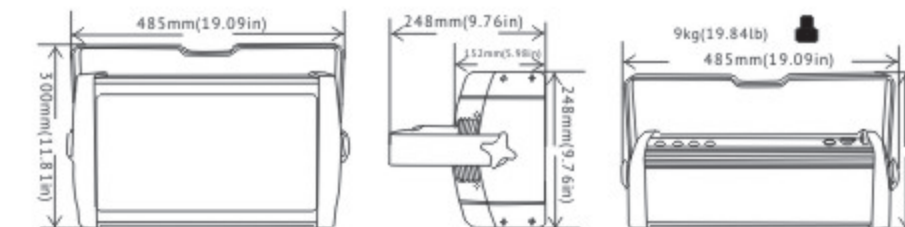

this light has 4CH, 19CH, 27CH, 10H, 14CH optional



Outdoor Colorful 5in1 LED Flat Par Light



Specification	
Product model	Flat 725G
Light sources	7pcs 25W RGBWA 5in1 LED Lamp
Input power	AC90-240V, 50/60Hz
Power	140W
Life span	500,000h
Color	RGBWA color mixing
Beam angle	20degree/30degree/60degree
Control panel	Digital tube + 4 buttons
DMX channel	5CH, 8CH
Control mode	DMX-512; Master/slave mode; Demo mode
Dimmer	0-100% linear dimmer
Strobe	1-25time/s
Body material	Aluminum die casting
Accessories	Power cable, signal cable
IP rating	IP 65
Net weight	6.2kg
Body size	270*256*145mm(without handle), 270*256*310mm(with handle)

54pcs 4in1/RGBW Outdoor LED Par Light



Specification		
Product model	VG-LP5412D	VG-LP354B
Light sources	54pcs 10W RGBW 4in1 LED lamps	54pcs 3W RGBW LED(R:12; G:14; B:14;W:14)
Input power	AC90-240V, 50/60Hz	AC90-240V, 50/60Hz
Power	200W, power factor PF≥0.95	165W, power factor PF≥0.95
Life span	500,000h	500,000h
Color	RGBW 4in1 color mixing	RGBW color mixing
Beam angle	20degree/45degree optional	15degree/60degree optional
Control panel	Digital tube + 4 buttons	Digital tube + 4 buttons
DMX channel	4CH, 9CH	4CH, 9CH
Control mode	DMX-512; Master/slave mode; Demo mode	DMX-512; Master/slave mode; Demo mode
Dimmer	0-100% linear dimmer	0-100% linear dimmer
Strobe	1-25time/s	1-25time/s
Body material	Aluminum die casting	Aluminum die casting
Accessories	Power cable, signal cable	Power cable, signal cable
IP rating	IP 67	IP 67
Net weight	9.5kg	9kg
Effect	3200k-10000K color temperature line adjust	3200k-10000K color temperature line adjust

18pcs 6in1 LED Outdoor Par Light



Specification	
Product model	VG-LP1818H
Light sources	18pcs 6in1 RGBWAUV LED lamps
Input power	AC90-240V, 50/60Hz
Power	200W
Beam angle	25degree(45 degree is optional)
Control mode	DMX-512; Master/slave; Demo
Control panel	Digital tube display+ 4 buttons
DMX channel	10CH
Projection distance	4-15m
Shell material	Aluminum die casting
Dimmer	0-100% linear dimmer
Strobe	1-25time/s
IP rating	IP 65
Accessories	Power cable, signal cable
Net weight	7kg
Body size	260*330*350mm

54pcs 3W RGBW Outdoor LED Par Light



Specification	
Product model	VG-LP543B
Light sources	54pcs 3W RGBW LED lamps
Input power	AC90-240V, 50/60Hz
Power	200W
Quantity of LED	R: 12; G: 14; B: 14; W: 14
Life span of LED	50000h
Beam angle	15/25/45/60degree
Dimmer	0-100% linear dimmer
Control panel	Digital tube display + 4 buttons
DMX channel	8CH
IP rating	IP 65
Cooling system	Cooling by die casting aluminum shell
Control mode	DMX-512; Master/slave; Demo
Accessories	Power cable, signal cable
Net weight	8.5kg
Body size	350*290*290mm

18pcs 6in1 Slim Outdoor LED Par Light



Specification	
Product model	VG-LP1818HS
Light sources	18W RGBWAUV 6in1 LED lamps
Input power	AC90-240V, 50/60Hz
Power	200W
Quantity of LED	18pcs 18W RGBWAUV 6in1 LED lamps
Life span of LED	50000h
Beam angle	25degree
Dimmer	0-100% linear dimmer
Control panel	Digital tube display + 4 buttons
DMX channel	8CH
IP rating	IP 65
Cooling system	Cooling by die casting aluminum shell
Control mode	DMX-512; Master/slave; Demo
Accessories	Power cable, signal cable
Net weight	7kg
Body size	260*330*350mm

18pcs 6in1 Indoor LED Par Light



Specification	
Product model	VG-LP1818H
Light sources	18pcs 6in1 RGBWAUV LED lamps
Input power	AC90-240V, 50/60Hz
Power	200W
Beam angle	25degree(45 degree is optional)
Control mode	DMX-512; Master/slave; Demo
Control panel	Digital tube display + 4 buttons
DMX channel	10CH
Projection distance	4-15m
Shell material	Aluminum alloy
Dimmer	0-100% linear dimmer
Strobe	1-25time/s
IP rating	IP 20
Accessories	Power cable, signal cable
Net weight	3kg
Body size	260*260*400mm

200W Warm White Outdoor COB LED Par Light



Specification	
Product model	VG-LP200-B
Light sources	1pc 200W COB warm white LED lamp
Input power	AC90-240V, 50/60Hz
Power	250W
Life span	500,000h
Color	golden white
Beam angle	30degree
Control panel	Digital tube + 4 buttons
DMX channel	5CH
Control mode	DMX-512; Master/slave mode; Demo mode
Dimmer	0-100% linear dimmer
Strobe	1-25time/s
Body material	Aluminum die casting
Accessories	Power cable, signal cable
IP rating	IP 65
Net weight	9.5kg
Body size	240*270*268mm

54pcs 3W RGBW Indoor LED Par Light



Specification	
Product model	VG-LP1543B
Light sources	54pcs 3W RGBW LED lamps
Input power	AC90-240V, 50/60Hz
Power	200W
Quantity of LED	R: 12; G: 14; B: 14; W: 14
Life span of LED	50000h
Beam angle	15/25/45/60degree
Dimmer	0-100% linear dimmer
Control panel	Digital tube display + 4 buttons
DMX channel	8CH
IP rating	IP 20
Cooling system	Active cooling by mute fan
Control mode	DMX-512; Master/slave; Demo
Accessories	Power cable, signal cable
Net weight	3.5kg
Body size	260*260*380mm

2.4G Wireless DMX Transmitter and Receiver



Control System Series

Specification	
Product model	VG-DWR2014
Signal strength	2.4G
Signal style	Sweden Wireless Solution
Receiving distance	500m(without obstruct)
Control panel	1 buttons
Power supply	common power supply
Input voltage	AC100V/240V, 50/60Hz
Power consumption	6W
Shell material	Aluminum alloy
Appearance color	black
IP rating	IP 20
Accessories	Power cable, C connector
Net weight	1.1kg

Outdoor 2.4G Wireless DMX Transmitter and Receiver



Specification

Product model	VG-OWS2018
Signal strength	2.4G
Signal style	Sweden Wireless Solution
Receiving distance	500m(without obstruct)
Control panel	1 buttons
Power supply	common power supply
Input voltage	AC100V/240V, 50/60Hz
Power consumption	6W
Shell material	Aluminum alloy
Appearance color	black
IP rating	IP 65
Accessories	Power cable, C connector
Net weight	2.5kg

2 DMX In 8 DMX Out DMX Splitter



Specification

Product model	VG-SP2-8A
Ports	2 DMX in, 8 DMX out
Ports style	3pins or 5pins
Input power	AC230V, 50Hz, or AC110V, 50Hz/60Hz
Power consumption	12W
Machine size	482 *155 x 45mm (19" Rack, 1U)
Net weight	3kg

1 DMX In 8 DMX Out DMX Splitter Light



Specification

Product model	VG-SP1-8A
Ports	1 DMX in, 8 DMX out
Ports style	3pins or 5pins
Input power	AC230V, 50Hz, or AC110V, 50Hz/60Hz
Power consumption	10W
Machine size	280*150*70mm
Net weight	2kg

1 DMX In 8 DMX Out DMX Splitter Light



Specification

Product model	VG-SP1-8B
Ports	1 DMX in, 8 DMX out
Ports style	3pins or 5pins
Input power	AC230V, 50Hz, or AC110V, 50Hz/60Hz
Power consumption	12W
Machine size	482*155*45mm (19" Rack, 1U)
Net weight	3kg

Sunlite Suite



Control System Series



Specification	
Product model	VG-Sunlite1, VG-Sunlite2
Software version	Sunlite 1, sunlite 2 optional
Controllable DMX512 channels	1024
Max fixtures	120
Max fixture channels	32
Direct call of scenes	30
Chase program	30
Power supply	USB or CE standard 9V adapter(option)
DMX output	2 DMX output (each 512CH)
Computer support	Support with PC working and off
Visualization	Support 3D simulation
Input voltage	DC9V-12V
Current	no less than 300mA
Body size	89*76*41mm

384 DMX Channels DMX-512 Console



Specification	
Product model	VG-DC384
Controllable DMX 512 channels	384
Max fixtures	30
Max fixture channels	32
Direct call of scenes	30
Chase program	30
Chase speed range	0.03s-180s
Chase trigger mode	Auto, music, swing
Chase direction control	Forward/inversion
Shape control	Yes, up to 50 SHAPE generators
LCD monitor	Yes
Flash-card port	Yes
Power	5W
Body size	485*267*85mm

48 Faders Studio Light DMX Console



Specification	
Product model	VG-DC48
Input power	AC90-240V, 50/60Hz
Power consumption	5W
Feature	
- DMX512/1990 standard, 48 DMX channels, output with optical isolated. 48 dimming channels, 48 preset fader. 12 sub-master fader, 96 scenes (8 pages). 48 Chases, up to 240 steps each. - Trigger mode selectable: Music synchronously or Auto. - LCD display with backlight.	

Accessories Series



VG-C18



VG-C1



VG-C8s



VG-C2s



VG-S4



VG-S180



VG-S280B



VG-S280C



VG-LC003



VG-LC001



VG-LC004



VG-LC006



VG-PT2.5



VG-TR3



VG-RD002



VG-TDS1.5

Some Cooperative Enterprises and Institutions

China Mobile Communication Corporation
China Unicom Communication Corporation
Sinopec
China Post
China Merchants Bank
Industrial and Commercial Bank of China
China Police
Land and Resources Bureau of Jiangsu Province
Beijing Media University
Shantou University
Zhejiang Police College
.....



Lecture Hall of China Mobile



Theater in Cyprus




Studio Room of Guangdong Normal University



The Show in USA



The Show in Austria

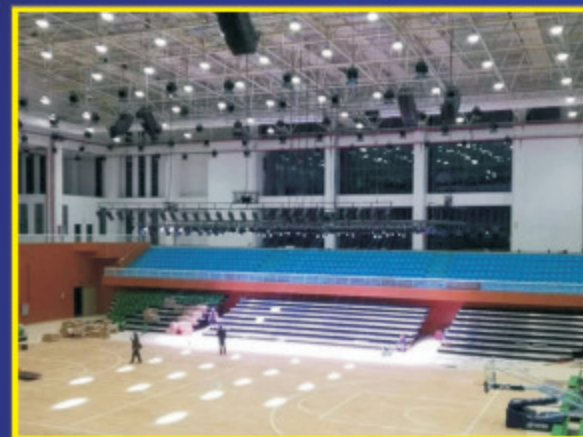

Auditorium of Shaoguan College



Lecture Hall of ICBC Hubei Province



Theater of Dinghu College



Square Dance Competition in Hebei



Wedding Celebration



Night Club in Foshan




Studio Room of Xiangtan TV Station



Shiyan TV Station



TV Station of Kaiyuan City, Yunnan

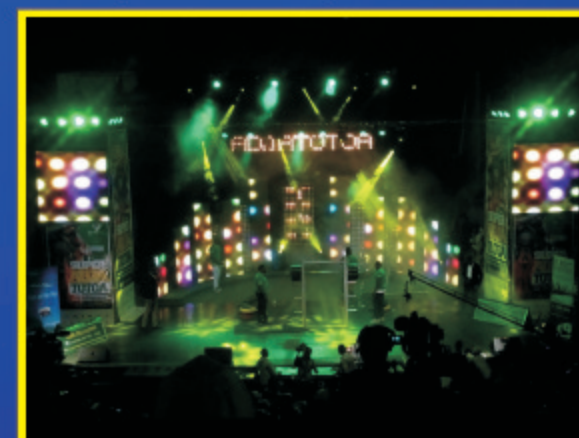

Event in Togo



Event in Estonia

Innovation, Quality and Performance
Create a better experience the feeling of light
VanGaa, Achieving Users' Value