



60W Zoom LED Profile Spot Leko Light

VG-LVF60Z

Technical Specification Sheet



VanGaa: Focus on
Studio Lighting Fixtures


www.VanGaa.com




P-60ww zoom

60W Zoom LED Profile Spot Leko Light(3200K/5600K)

This is a professional LED Fixed Lens Profile Spot Light. It uses high CRI and high power LED integrated lamp (COB lamp) as the light emitting element. So the light has high light efficiency, good color rendering, low glare value, long lifespan, energy conservation, environmental protection and other advantages.

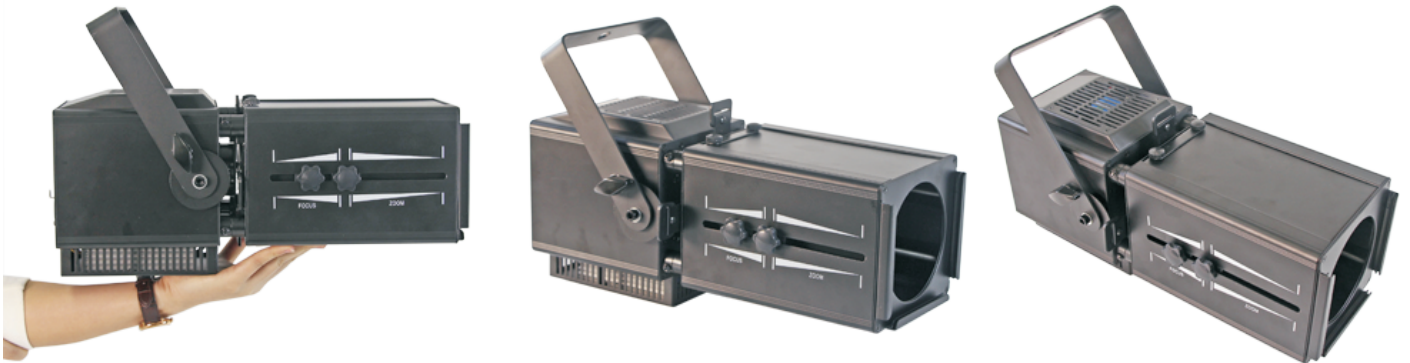

Dimension

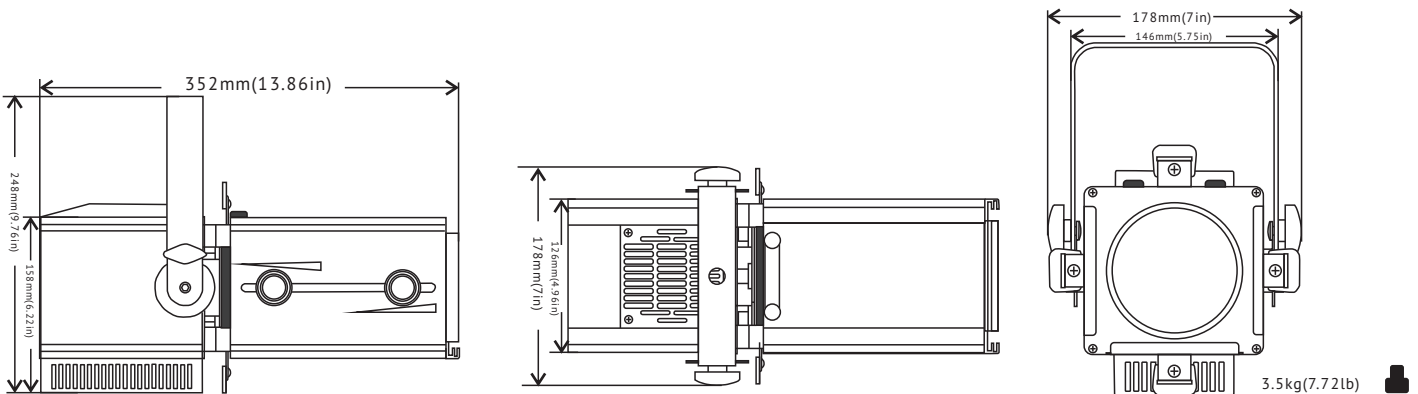

Technical Specification

Light Sources

- 1pc white 60W COB LED Lamp, 3200K /5600K optional
- Lifespan: 50,000hours
- Color: WW or CW
- CRI: ≥Ra92

Optics

- Beam angle: 17-35degree, manual zoom
- Gobo clip: 1pc gobo clip with gobo optional
- Dimmer: 0-100% linear dimmer
- Strobe: 1-25 times/second

Light Output

- Luminous flux: 25200 Lm
- Illuminance: 25200 Lux (2m 19° 3200K)
- Optimal projection distance: 4-16m

Control

- Control mode: DMX-512; Demo; Master/slave
- DMX channel: 3CH

Power Supply

- Related voltage: AC100V-240V, 50/60Hz
- Related power: 80W

Construction

- Body dimension: D350*W180*H160mm
- Net weight: 3.5kg
- Shell color: black/white
- Shell material: stell

Working Environment

- Working temperature: -25-40
- Cooling: aluminum radiator and mute fan
- Protection rating: Ip20

Spare Parts

- Cable: 1set DMX in and DMX out signal cable, and 1set Power in and Power out power cable with plug [standard configuration]
- Gobo holder: 1pc gobo holder


Package

- Carton board box package size: 450*210*220(1pc/carton)
- N.W/G.W: 3.5kg/4.5kg



DMX Channel Chart

3CH	1	2	3
%	Dimmer	Strobe	Dim4
100% 255		random strobe	255
			192
		pulse-effect in sequences	28
			64
0% 0		strobe close	

Relative Dimension

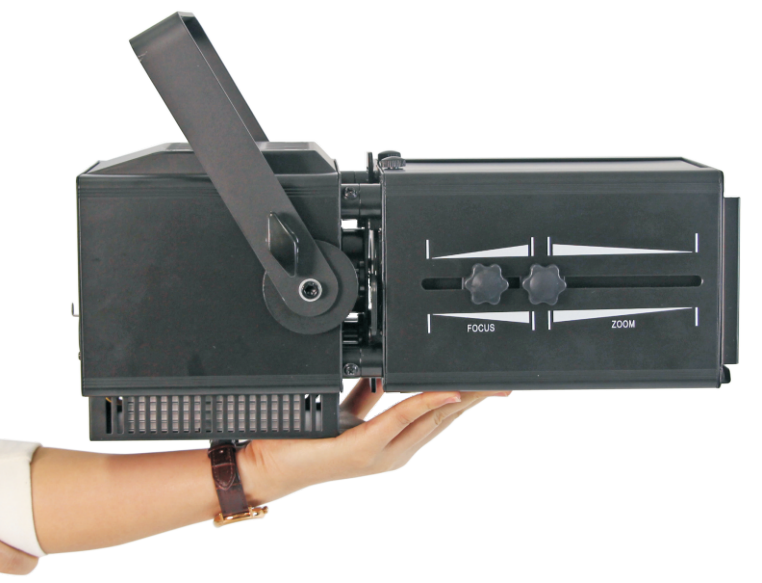

Illuminance Chart

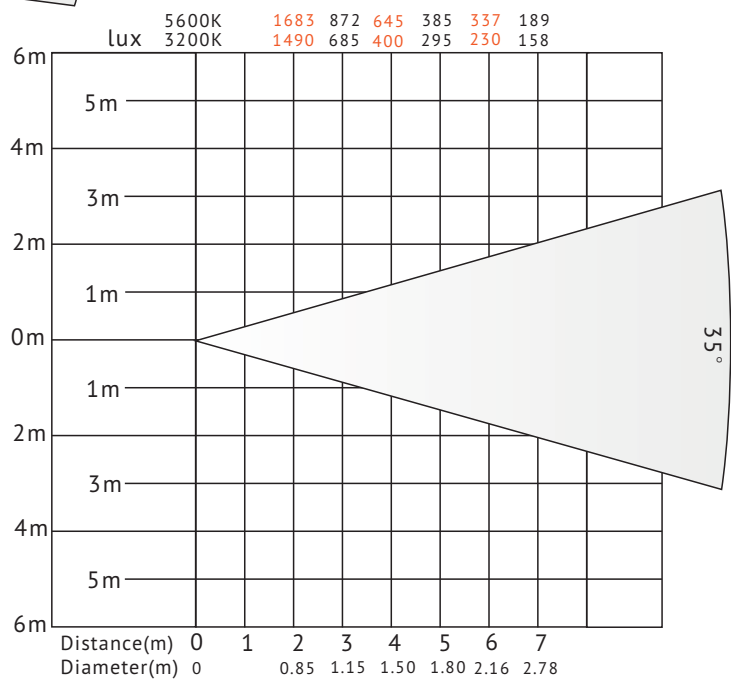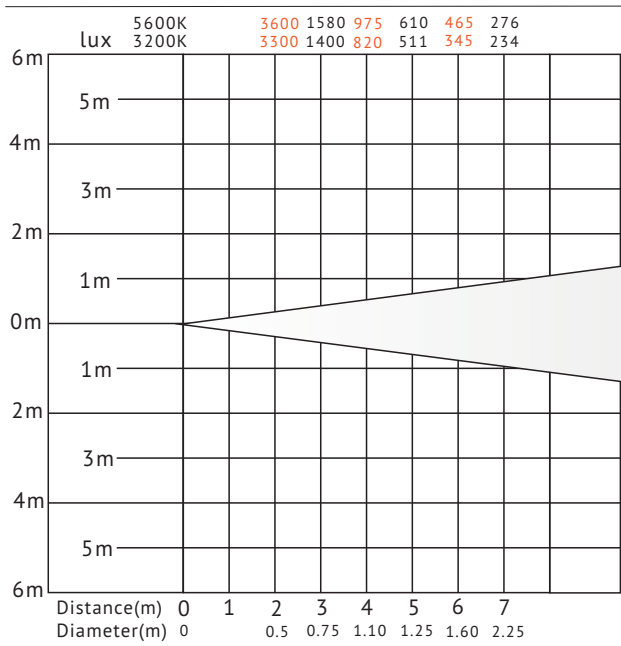

Effect

